


# TRIMBLE

## TRIMBLE 4<sup>1</sup> Composite Frame

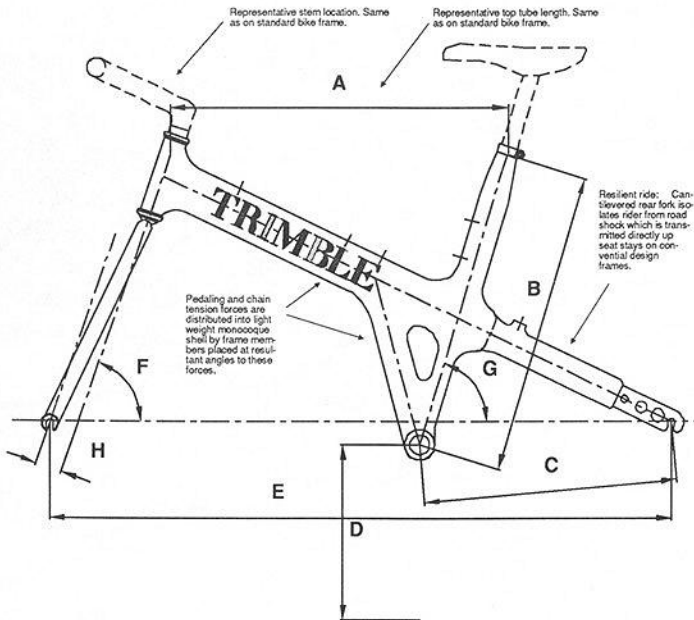

FRAME GEOMETRY

### TECHNICAL SPECIFICATIONS

- Frame Material:** duPont Kevlar™, carbon fiber, and fiberglass in epoxy resin matrix.
- Frame Fittings:** 2024-T3 and 6061-T6 Aluminum with steel seat-post clamp. Dual water bottle cage "braze-on's".
- Component Information:** Bottom bracket threading: English. Seat post size: 26.8mm. Wheel size: 26".

- Brakes:**  
Rear - Shimano Deore XT U-Brake.  
Front - standard cantilever braze-on bosses.  
Front derailleur mount: Standard band clamp.  
Shift cables: internally routed.

### FRAME GEOMETRY CHART

	A	B	C	D	E	F	G	H
Frame Size	Top Tube	Seat Tube	Chain Stay	Bottom Bracket Height	Wheel Base	Head Tube Angle	Seat Tube Angle	Fork Offset
18"	22 1/8"	18"	17"	11 1/2"	41 1/8"	70°	72°	1 3/4"
20"	22 1/2"	20"	17"	11 1/2"	41 1/2"	70°	72°	1 3/4"
22"	22 7/8"	22"	17"	11 1/2"	41 7/8"	70°	72°	1 3/4"
Competition Model								
18"	22 1/8"	18"	17"	11 1/2"	41"	71°	73°	1 3/4"
20"	22 1/2"	20"	17"	11 1/2"	41 1/2"	71°	73°	1 3/4"
22"	22 7/8"	22"	17"	11 1/2"	42"	71°	73°	1 3/4"

- Notes: 1. Top tube and chain-stay lengths are measured from center to center.  
2. To allow for design improvements these specifications are subject to change without notice.

# TRIMBLE

Trimble Products Co.  
P.O. Box 246  
Berryville, Arkansas, USA 72616  
(501) 423-2470

© Copyright 1988 Trimble Products Co.