

RETAIL TECHNICAL MANUAL
1996



GARY FISHER

Table of Contents

| | |
|---------------------------------|-------|
| Gary and Greg | 2 |
| Frame Materials | 3 |
| Suspension Technology | 4 |
| Geometry Terminology | 5 |
| 1996 Shimano Groups | 6-8 |
| Misc. Specs '96 | 9 |
| GripShift ESP 900 | 10 |
| Gary's Eye for Detail | 11 |
| Bike Specs: A Guide | 13 |
| Minnosaurus | 14 |
| Shortcut | 15 |
| Gary Fisher Small Bikes | 16 |
| Tyro | 17 |
| Maniac | 18 |
| Wahoo | 19 |
| Marlin | 20 |
| High End Cro-Moly Steel | 21-22 |
| Tassajara | 23 |
| Mamba | 24 |
| Aquila | 25 |
| Hoo Koo E Koo | 26 |
| X-Caliber | 27 |
| X-Caliber RX | 28 |
| Lower Weight: Aluminum | 29 |
| Kaitai | 30 |
| Big Sur | 31 |
| Montare | 32 |
| Paragon | 33 |
| Mt. Tam | 34 |
| Supercaliber | 35 |
| Space Age Bikes: OCLV | 36 |
| Procaliber | 37 |
| Procaliber Ltd. | 38 |
| Full suspension | 39-40 |
| Joshua X | 41 |
| Joshua Y | 42 |
| Joshua Z | 43 |
| Avant Garde | 44 |
| Zebrano | 45 |
| Alfresco | 46 |
| Klunker | 47 |
| Nirvana | 48 |
| Utopia | 49 |
| Greg LeMond Bicycles | 50 |
| Tourmalet | 51 |
| Alpe d'Huez | 52 |
| Zurich | 53 |
| Chambéry | 54 |
| Maillot Jaune | 55 |
| Torque Specs | 56 |
| Mechanic's Notes | 57 |
| Threaded Fastener Prep | 58 |
| Gary Fisher Ginzu Hubs | 59 |
| Fisher bottom Bracket | 60-61 |
| AheadSet Adjuster | 62 |
| Fisher Cable Routing Maps | 63-65 |
| Glossary of Terms | 66-68 |

Gary and Greg

The Evolution of Mountain Bikes

The year: 1974

Although having loads of fun descending the Marin foothills on his custom built downhill cruiser, Gary Fisher had the desire, and the legs, to pedal back up. He only needed the right equipment, he told his downhill buddies. His friends scoffed as they hopped into the old pickup for a lift back to the top for another run.

Meanwhile, Gary's mind was buzzing as he pedaled home. Diving through boxes of old bike parts, Gary's vision began to take shape. A few scavenged motorcycle parts, the artistic wave of a brazing torch, and Voila!

MountainBikes were born!

Since then, Gary's vision has continued to blossom. He combined his proven ingenuity with his feel for bicycles developed during his campaign as one of the best American road riders of his time. The result has been mountain bikes on the cutting edge of performance; Fat-tire wonders reknowned for their performance and innovative solutions to the problems of off-road riding.

Gary's list of innovations accepted as standard spec reads like a definition of the ideal modern mountain bike- short wheelbase, steeper angles, short chainstays, larger diameter tubes, more tire clearance, oversize headset and steering components....the list goes on.

The Mountain Bike of Tomorrow- Today!

And Gary's vision hasn't stopped. Still an active NORBA racer, Gary races and trains almost every day. And his creative genius is at work during every mile. When your customer buys a Procaliber Ltd., they're riding the same bike Gary himself rides.

Gary personally tests the parts and complete bikes in the Fisher line to see that they meet his demands. Gary also rides the competition to see how they check out, so that Fisher bikes will always be ahead of the pack.

Here are a few of the highlights of Gary's '96 line:

- New small frame sizes
- 3 models of full suspension bikes
- Refined frame fit details and adjusted head tube lengths for better handlebar position and overall fit
- 20 tooth chainrings making for lower gears on many bikes
- Kids models
- New tubing diameters and geometry on high-end steel bikes
- New geometries on aluminum models; and butted tubesets on some
- Upgraded Rock Shox suspension forks, as well as suspension forks from Manitou.
- New Urban bikes, the Nirvana and Utopia. Not your standard hybrids!

And the introduction of the all new Greg LeMond road bikes.

You can't call yourself a real cyclist if the TV didn't bring you goosebumps. Greg charging madly down the Champs d'Elysee, in full aero tuck. The clock ticking. And in the final time trial stage of the tour, Greg steals the overall victory from Fignon by mere seconds.

In addition to being a great bike racer, Greg has a long history in developing innovative products. The list of products Greg has been involved with is long, and the company names have since become well known. Many of those products are considered to be industry standards today: Cycling eyewear, EPS foam helmets, clipless pedals, aero bars...the list goes on and on.

Now Greg's focus is on bikes with his own name on them. Greg is a real stickler for the correct geometry, knowing as he does how important the bike is to a cyclist's success. It has to fit right. And have the right ride. Be made of the right materials, and with the right specs. He's striving to make sure every detail on his new bike line is absolutely perfect. Bikes ready for the Pro peloton. And sure winners.

We hope you will take the time to read through the information presented in this manual, and that the specifications and other resource material will be of help to you when selling Gary Fisher or Greg LeMond bikes in the upcoming year. If you have any suggestions regarding this manual, or any other ways we can be of service, please write to :

Gary Fisher Customer Service

P.O. Box 183
Waterloo, WI 53594

Frame Materials

A bicycle must be strong and it must be stiff. It should ride great, and it should be as light as possible to avoid wasting the rider's energy. And let's not forget that it should be affordable.

Its easy to see that strength is required. And low weight. Correct stiffness means that pedaling energy is transmitted to the rear wheel better. It also means that the wheels stay in plane when side-hilling, making the bike easier to control in technical terrain. Stiffness also prevents the frame from twisting in hard corners or rough terrain, which would allow the bike to change lines unexpectedly.

But like anything else, you can overdo a good thing. If a bike is too stiff, it will ride harshly and the wheels won't follow the terrain like they should. If its not stiff enough, it won't ride right either.

The right material in the right dimensions adds to the feel of the ride. By experimenting, we've achieved that feel while maintaining a light, efficient, durable, and affordable lineup for any serious rider.


The two most important considerations when selecting a material for bicycle construction are Specific Ultimate Strength and Specific Modulus. In layman's terms, Specific Ultimate Strength is the breaking strength of a material divided by its weight. Specific Modulus can be translated to mean the stiffness per weight.

The reasons for the importance of these factors are simple. If a material does not have a blend of stiffness and strength, it will either be heavy or be lacking in either strength or performance. Let's look at an example: Cro-Moly steel has a high specific modulus, but a fairly low specific ultimate strength, as shown in the chart. This means that a fairly high amount of material by weight will have to be used to make a Cro-Moly bike of good strength. However, Cro-Moly steel is usually relatively inexpensive and so can offer a good value, even if a Cro-Moly bike will be a little heavier than one of our aluminum or carbon fiber models.

As another example, carbon fiber composite is quite a bit more expensive than Cro-Moly steel. However, because it has very high specific ultimate strength, a very light bike can be built that is very strong. In addition, carbon composite's high specific modulus means that even a very light carbon bike can still have the right stiffness for control and efficiency.


Another high tech material for bicycles is titanium. Although different alloys vary somewhat in their characteristics, generally titanium has a lower specific modulus than carbon fiber composite, Cro-Moly steel, and many aluminum alloys. Titanium has a higher specific ultimate strength than Cro-Moly steel, but is lower in strength than carbon composite. This means that a titanium bike of good strength and stiffness will be heavier than a carbon fiber composite bike of like performance, even though considerably more expensive.

As you look at these charts comparing characteristics of the various materials, remember that many factors will effect the end product. For example, increasing the diameter of a tube will increase its stiff-

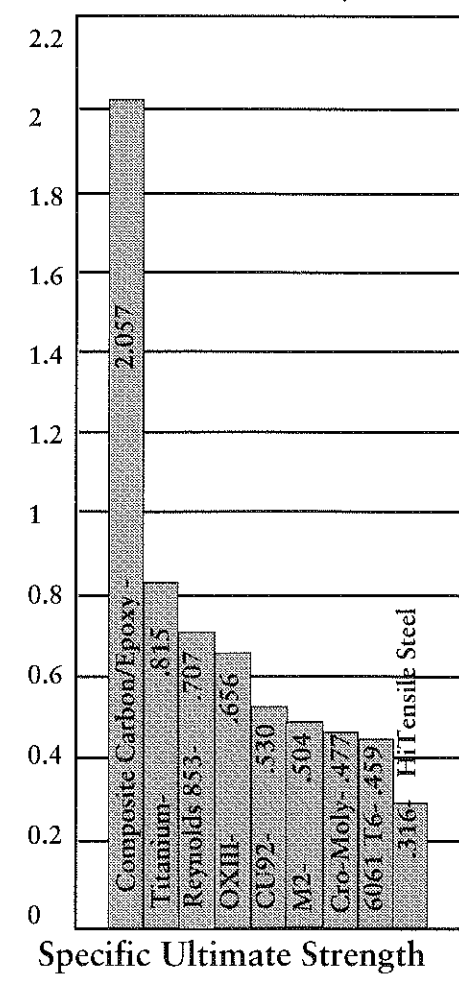

ness, but reduce its resistance to dents. Manufacturing techniques will effect the price of a completed bicycle, where efficiency and accuracy can eliminate wasted time. A particularly interesting example is that from the strength listed on the chart, Reynolds 853 actually gets stronger when you weld it. And volume of manufacturing can bring prices down, an important fact that allows Gary Fisher and LeMond bicycles to provide expensive OCLV carbon bikes at competitive prices.

Another important point is that there's more to a bicycle than the tube set. Tubing which is no longer straight, or bikes that don't track straight due to poor alignment, are poor values. Both Gary Fisher and LeMond bicycles are built with high tech processes to ensure that the properties of the tubing remain after construction. Combined with Greg and Gary's designs, this means that your customer will get the most performance possible at every price point in the line.

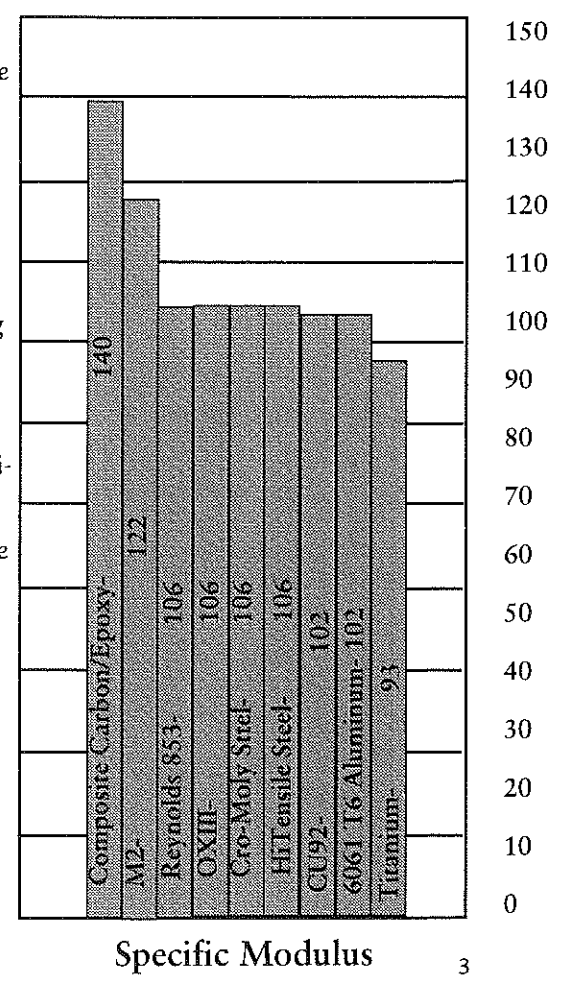

Suspension Technology

For the '96 Gary Fisher bicycle line, you'll find a lot of suspension. To help you understand and sell the differences between the various shocks used on our bikes, we offer the following explanations:

SR DuoTrack 7006 fork

The DuoTrack uses a coil steel spring for 35 mm of travel. New this year are elastomer bumpers for both top-out and bottom-out, so if the rider does manage to max the fork out, it's much quieter.

Rock Shox Quadra 5 fork

The Quadra 5 has 48 mm of travel and uses a one-piece urethane elastomer. The preload is adjustable by hand with external adjusters at the top of each stanchion.

Rock Shox Quadra 21 R fork

The 21R uses the body of a Quadra and the MCU elastomers from the Judy technology to offer 60 mm of plush travel.

Rock Shox Judy XC fork

The Judy XC uses an MCU, or Micro Cellular Urethane elastomer stack with hand operated preload adjuster at the top of each fork leg. Because the elastomer stack is comprised of several separate pieces of different durometers, it's also possible to change-out the pieces to further modify the stiffness if desired. Judys use oversized fork legs and a recessed brake arch to resist twisting during braking. Fork leg overlap and bushing separation are more than double that of the Quadras. This gives the Judys incredible lateral rigidity and steering control. The left leg uses a hydraulic damping cartridge which has its oil permanently sealed. Rock Shox uses damping to control the compression phase of the fork's motion because this is when the greatest forces are at work.

New for '96, the XC's damping range is adjustable like the '95 Judy SL and the new XC's stock travel has been boosted to 63.5 mm from last year's 50 mm. On the Joshua Y, Gary has specified the long travel XC-L with 75 mm of travel to compliment the 4" of rear end travel of the Joshua.

Rock Shox Judy SL fork

This fork shares the features of the XC including travel. However, the SL is considerably lighter. Weight savings come from the use of titanium hardware and an aluminum alloy steerer. The crown and stanchions of the Judys are pressed together, saving weight by the exclusion of crown pinch bolts. On the Joshua Z, we are using a special version of this fork, with 75 mm of travel and carbon fiber brake arch.

Manitou Mach 5 Pro fork

The new Mach 5 fork series offers several advantages. First, the new Posi-Link brake arch uses a bonded construction with a very large cross-section construction. This adds greatly to the rigidity and steering control of the fork, while reducing weight and maintenance because there are no bolts to tighten. The Pro is a step up from the Mach 5 Comp with lighter tapered fork legs, fork boots, and 7 mm more travel for a total of 58 mm. The Pro also uses 2 stage MCU elastomers. See the Gary Fisher Owner's Manual for adjustment information.

Manitou Mach 5 SX fork

The Mach 5 SX offers 63 mm of travel with 3 stage MCU elastomers and adjustable rebound damping. Since compression damping makes a fork stiffer, Manitou chose to control the fork's speed during the rebound phase to maintain a softer compression stroke for the plush ride possible. The SX is lighter than Manitou's EFC downhill fork, with a lower ride height for better handling and slightly less travel.

Stratos Air/Oil rear shock

The Joshua Z uses this cool air/oil unit. With a handlebar mounted control, the rider can adjust the damping on the fly from super plush to almost completely locked out. A little experimentation will show that you can ride a different air pressure when you have this much damping control. So in a way, the whole shock is more adjustable.

Rock Shox Deluxe coil/over rear shock

The Joshua X uses a steel coil spring over an hydraulic damping cartridge. Since a coil spring has no stiction and the oil cartridge has very little, this shock works better than an air/oil unit in soaking up small frequency bumps. It is also easy to adjust and maintain, since there is no air pressure to keep up.


Rock Shox Super Deluxe coil/over rear shock

The Joshua Y uses a similar set up to the Joshua X, except that rebound damping is adjustable. This allows tuning of the shock action, a particularly nice feature for the higher rebound forces which occur in harder and faster riding. Rock Shox also makes a version of the Super Deluxe with a titanium coil spring.

Girvin Flexstem

Two of Gary's hybrids use the Girvin Flexstem for added comfort. The Alfresco uses an aluminum Flexstem, while the Zebrano uses a steel version. Both stems cushion the rider's hands from road insults by compressing an elastomer as the stem hinges. The elastomer can be changed to vary the stiffness. Travel is dependent on stem length.

Geometry Terminology

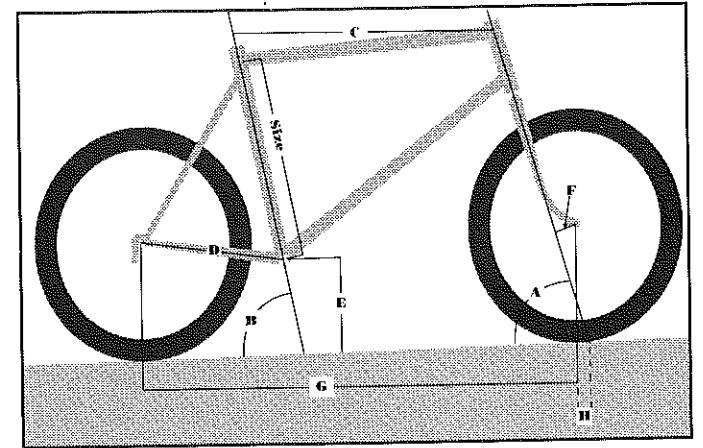

- Standover height - The distance from the center of the top tube, measured at the middle of its length, to the ground. This is popularly used for sizing, but with today's geometry it's only one component of a good fit.
- A: Head Angle - The angle formed by the intersection of the centerline of the head tube and a horizontal plane. This angle effects steering quickness, and the steeper the head angle, usually the quicker the steering.
- B: Seat Angle - The angle formed by the intersection of the centerline of the seat tube and a horizontal plane. This angle effects the fit of the bike, particularly addressing the length of upper leg bone, or femur, by changing the rider's position over the crankset. Usually, smaller bikes will have steeper seat tubes, while larger bikes will have more relaxed seat angles.
- Size- The distance from the center of the bottom bracket to the center of the top tube measured along the seat tube. Both Gary and Greg measure this way because that's how it's shown on the engineering drawings, and because it more accurately tells the size of the frame. By using the center to center method, standover height may change with tube diameter, but the actual fit is accurately described. Alternate methods may measure to the top of the seat tube or top of the top tube, including the variable of tube diameter or extended seat tubes. Seat tube length relates to overall leg length, but with the advent of super-long seatposts and new frame designs, seat tube size is less meaningful than it once was.
- Top Tube Length- The distance from the junction of the centerlines of the head tube and top tube to the junction of the centerlines of the seat tube and the top tube. This measurement relates to torso length and positioning on the bike.
- C: Effective Top Tube Length- The length of a horizontal line from the junction of the centerlines of the head tube and top tube to the imaginary centerline of the seat tube. This measurement is important due to the sloping top tube with extra long seat post extension currently favored by mountain bikers. A more accurate version of the top tube measurement, this relates to torso length and positioning.
- D: Chainstay Length- The distance from the center of the bottom bracket to the center of the rear axle. This dimension effects weight distribution over the rear wheel.
- E: Bottom Bracket Height- The distance from the center of the bottom bracket to the ground. This measurement effects ground to pedal clearance, as well as stability of the bike by dictating the height of the rider's center of gravity.
- F: Offset or Rake- The perpendicular distance from the centerline of the head tube to the center of the front hub. Rake combined with head tube angle and wheel diameter yields trail.
- G: Wheelbase- The distance from the center of the rear hub to the center of the front hub. This determines handling characteristics like turning radius, tracking stability, and shock absorption.
- H: Trail- The distance between where the head tube centerline intersects the ground and a vertical line dropped from the center of the front hub. This measurement effects the stability of the steering system and the feel of the steering. Longer trail usually means a "heavier" or more stable feel, while less trail usually feels "quicker" or "lighter".
- Front Center- The distance from the center of the bottom bracket to the center of the front hub. This distance effects both weight distribution and toe clip /front wheel overlap. Given that most mountain bikes use only a narrow range of steering angles and offsets, front center also refers to the amount of "cockpit room" the rider will have.
- Stem- This should be considered part of the bike's geometry because it effects weight distribution and steering feel. Along with handlebar width, it also relates to arm and torso length.
- It All Works Together- Every facet of bike design will effect another, so we can only talk in generalities about what any one dimension does to the bike. It's obviously true that each part of the bike is connected to another part of the bike. However, it isn't always apparent how changing one dimension on a bike will effect the others.

1996 Shimano Groups

XT

- **RapidFire SL shifting-** Even less shift lever pressure is required with the new SL shifters. In addition, each shift requires a shorter throw of the lever. As expected, for the best performance, Shimano recommends that you do not mix previous components with newer items.
- **New cables and housing-** In '95, Shimano used a 1.1 mm cable with 3.6 mm housing. This allowed the housing to be more flexible, and reduced cable friction for smoother shifting. But the smaller diameter allowed some compression in some circumstances, so the sizes have been beefed up for '96. The new dimensions are 1.2 mm cables, with 4.0 mm housings.
- **Mechanics should note that the new Shimano housing comes pre-greased.** To prevent the grease from being pushed out of the housing, the cable should always be inserted into the end of the housing with the Shimano logo first, so the logo is closest to the respective lever. With some models we may use housing from another supplier. In this case, look for the housing end cap with extra rings which notes the end with grease inserted.
- **Top Swing front derailleur-** This new design was incorporated in some of Shimano's lower-line derailleurs in '95. By moving the derailleur cage in a straight line rather than an arc, Top Swing provides a linear spring rate to the front derailleur. This means more powerful shifting onto the large chainring with lighter action and increased durability. The linear spring rate also means a softer return for smoother downshifts.
- **Since the clamp band of the Top Swing design is lower than on previous derailleurs, on some frames this may be incompatible such as Joshuas and OCLV hardtails.** For these bikes, Shimano has made a new conventional front derailleur with Advanced Light Action to interface with the new RapidFire SL shifters.
- **Rear derailleur-** The new 'high efficiency' rear derailleur gets a stiffer upper 'P'-spring which adds chain tension, and along with the IG chainrings and chain works to virtually eliminate chainsuck. 'Advanced Light Action' is designed to work with the shorter throw and softer push of the new RapidFire SL shifters.
- **V-Brakes-** The long arms of the V-Brakes give extra leverage for incredible stopping power. V-Brakes open easily and very wide for easy tire removal. The V-Brake's unique linkage system keeps the pad parallel to the rim, rather than following an arc like a traditional cantilever. This means more powerful stopping, better modulation, less pad wear, and no "dive" from wear. This also means less chance for the pads to "drift" if not properly maintained and readjusted as they wear, which can cause tire sidewall cuts. Because of the large amount of cable pull required for the V-Brake, they require a specific Shimano V-Brake lever which utilizes an adjustable variable pull mechanism. As a bonus, the V-Brake has a side-actuating system with a very narrow profile, making it ideal for full suspension bikes with low cantilever boss placement where cable routing or leg clearance might be a problem. Since the new V-Brake requires a cable housing stop for the rear brake at the seat cluster, these brakes may not be compatible with some framesets.
- **Bottom Bracket Cartridge-** The new XT bottom bracket features chainline stabilizers to prevent over insertion of the cranks, which could effect chainline.
- **IG System- chain and chainrings-** Specially shaped tooth profiles and shifting ramps enhance shifting speed and accuracy. Combined with the new IG chain with new 7.1 mm width, this also virtually eliminates chainsuck. Although you will get acceptable performance mixing most of the parts, its recommended for best performance that you do not mix them. In any case, avoid using a HG or UG chain on the new IG chainrings, as the chain may tend to come off easily, which is potentially dangerous. Older IG chains, the IG50 and IG30, use a 7.3 mm chain width. These chains will not work with HG cassettes. If you use a new 7.1 mm chain on an older HG cassette, the SIS adjustment will be slightly more sensitive, so pay extra attention to this. IG chains will not work with Altus C90 derailleurs.
- **Other-** Independent shift pods and brake levers allow you to mix and match components as you see fit.

LX

The new LX group shares all of the new features listed for XT, with the exception of V-Brakes.

Please read about the important features of these under the XT heading. In addition, LX gets: "Easy Set" Cantilever brakes-The new LX cantis feature the "Easy Set" design. This is an automatic toe-in feature, designed to simplify assembly.

STX, STX-RC

These groups get the new RapidFire SL shifting, Top Swing front derailleur, Easy-Set cantilevers, new 7.1 mm chain, and independent shift pods and brake levers. Please read about the important features of these under the XT heading.

Cranks- the cranks have been cosmetically changed.

Bottom bracket- the new BB-LP26 now inserts 'normally' from the right side of the bike, and is denoted by the new grey colored 'fixed cup'.

Alivio

Shift/brake levers- new finish.

Top Swing front derailleur- new finish.

Rear derailleur- 'High Efficiency' design.

Brakes- 'Easy-Set'

Cranks- New cosmetics

Bottom bracket- the new BB-LP26 now inserts 'normally' from the right side of the bike, and is denoted by the new grey colored 'fixed cup'.

"Silent Clutch" rear hub- 'Silent Clutch' design uses roller clutch for super durable, quiet operation. By using a set of roller bearings for drive, rather than a pawl-and-tooth design, this hub gives a very smooth engagement which adds rear wheel traction and smooths shifts even more than the standard IG system.

Accra-X

Bottom bracket- the new BB-LP26 now inserts 'normally' from the right side of the bike, and is denoted by the new grey colored 'fixed cup'.

Altus C-90

Shift/brake levers- E-Z fire design .

Front Derailleur- new finish

Rear derailleur- Alloy B-body- the part which bolts to the frame.

Brakes- 'Easy Set'.

Bottom Bracket- BB-CT91 inserts 'normally' into right side of the frame.

Cranks- Cosmetic change to the arm.

Shimano Offroad Groups

Misc. Specs '96

| Bottom Bracket | BB-UN72 272 Right | BB-UN52 316 Right | BB-UN52 316 Right | BB-UN52 316 Right | BB-LP26 341 Right | BB-LP26 341 Right | BB-CT91 Left | BB-CS11 387 Left | Model Name Weight, gms Installation side |
|--------------------|--|---|--|--|--|-----------------------------------|-----------------------------------|---|--|
| Brake/Shift Levers | • 2 1 4 1 398 | • 2 1 4 1 383 | • 2 1 4 1 394 | • 1 1 4 1 385 | - 1 1 3 1 416 | - 1 1 1 1 - | - 1 1 1 1 - | - 1 1 1 1 - | RapidFire SL Ft Upshifts/Stroke Ft Downshifts/stroke Rear Upshifts/Stroke R. Downshifts/stroke Weight, gms |
| Brakes | - • • • 383 | - • • • 370 | • • • • 366 | • • • • 338 | • • • • 368 | - • • • - | - • • • - | - • • • - | Anti-Vibration Cartidge-type pad Bushing-type mount V-Brakes Weight, gms |
| Front Derailleur | 22T • 133 | 20T • 132 | 20T • 135 | 20T • - | 18T • 163 | 18T • - | 14T • - | 22T • 164 | Total capacity Stainless fasteners Weight, gms |
| Rear Derailleur | Al, polished & clear coated Al Al, anodized Steel 32T/11T/38 250 | Al, painted Al, painted Steel Chr. plated Chr. plated 32T/11T/38 285 | Al, polished Al, polished Steel Chromica Paint steel 28T/11T/37 293 | 28T/11T/37 266 | 28T/11T/35 267 | 28T/11T/31 - | 28T/11T/31 - | 28T/14T/34 317 | Pivot/pulley cage Outer link Inner link Outer cage plate Inner cage plate Max/Min/Capacity Weight, gms |
| Chain | IG Nickle plated Nickle plated | IG Barrel Nickle | IG Barrel Nickle | IG Barrel Nickle | IG Brown Barrel | HG Black Black | HG or UG Black Black | UG Black Black | Chain type Inner link Outer link |
| Rear Hub/Cassette | 8-al spider • • • 475 Chrome compatible 256 | 8 • • • 452 Silver compatible 326 | 7 • • • 442 Chromica IG 254 | 7 • • • 449 Chromica IG 299 | 7 • • • 445 Silver IG 299 | 7 • • • Black - | 7 • • • Brown - | 6 FW - - - Black - 460/FW | # of gears Freehub w/QR Alloy QR lever Hub weight, gms Cassette color IG Cassette wt, gms |
| Crankset | compatible 22/32/42 A/A/S 58/94 694 | compatible 22/32/42 A/A/S 58/94 681 | • 22/32/42 A/S/S 58/94 769 | • 22/32/42 S/S/S 58/94 800 | • 24/34/42 S/S/S 67 843 | - 24/34/42 S/S/S Riveted | - 24/32/38 S/S/S Riveted | - 28/38/48 S/S/S Riveted | IG Chainring teeth C-ring material Bolt hole circle Weight, gms |
| | XT | LX | STX-RC | STX | Alivio | Acera-X | Altus C90 | Tourney | |

Tioga tires

Tioga uses a variety of descriptor letters along with the names of their tires. These can be confusing, so here we'll try to straighten it out:

Psycho- 1.95 casing width with the tread width more like that of a 2.1. Recommended tire mounting has the front chevrons pointing forwards, and the rear chevrons pointing rearwards when on top of the wheel.

K- Slightly rounded tread blocks, with more spacing between the knobs. Lighter and faster. The Psycho K weighs 540 grams.

S- Steel bead. The Psycho KS weighs 580 grams.

T- New rear specific tread with larger knobs for wear, and more cross-block tread for in-line traction both climbing and braking.

R- Amber or blond colored, softer tread, and we thought it was R for Racing.

II- Denser tread pattern for durability.

Psycho Ltd.- Uses a Cyclex casing with Kevlar beads resulting in a very low weight of just 470 grams.

GripShift

On the Shortcut, the simplicity and reliability of GripShift are much better than the more complicated mechanisms used in other shifting systems. Another benefit of GripShift on the Shortcut is that its shifted using bigger muscles of the forearm and wrist instead of finger and thumb, so its easier for small hands to operate.

Features for '96 include the new 900 ESP shifters and rear derailleur which weighs just 185 grams. See page 10 for specific information on this new system.

Sugino cranks

Gary has spec'd Sugino cranks on many of his '96 models. On many models, these cranks offer a 20T inner chainring. While this gives a lower low, it also makes for improvement of the entire low range. We have also chosen Sugino cranks for their weight savings where appropriate.

Impel 300- 3 steel rings, 875 gms.

Impel 350- 42T ring anodized "Super Duralumin", 740 gms.

Impel 500- Middle and big ring anodized "Super Duralumin", 675 gms.

Impel 700- Similar to the 500, but with hard anodized alloy rings for extra durability. 675 gms.

Bontrager rims

Bontrager Red Label- A premium lightweight off road rim, built to withstand the rigors of off road use, and at a mere 370 grams. Made from 6000 series aluminum alloy with a special cross section designed by Keith Bontrager with multiple cavities for lower weight and high strength. Recommended for front use only. Special rim sidewall preparation adds braking performance. Stainless eyelets.

Bontrager Blue Label- A heavier version of the Red Label, designed for rear wheel use. Still light at just 410 grams.

Matrix rims

Matrix Lobo- Matrix rims are made in the U.S.A. The Lobo uses 6000 series alloy in a single wall, dual cavity sport/performance design. This rim offers world class, "seamless" braking performance thanks to the welded construction and machined sidewalls. 505 grams.

Mavic rims

Mavic 221 "UB Control"- The 221 is a pinned construction rim which uses Mavic's UB Control technology. UB is a process for machining the rim's sidewalls. This provides a very accurate rim dimension for smooth, uninterrupted sidewalls and some texture which adds to the stopping performance. 440 gms.

Mavic 217 "UB+SUP"- Mavic's SUP technology with its welded construction and UB Control machined sidewalls for the best performance. Single cavity. Eyeletted. 410 grams.

GripShift ESP 900

SRAM Corporation's GripShift shifting systems have been winning fans in the mountain bike world for several years now. The growth in GripShift's popularity stems from their ease of use, low weight, relative simplicity, and the expected durability that comes with that simplicity. All these features are the result of a lot of R&D by the people at GripShift, who listened to their customers and worked hard to deliver what riders asked for.

Dedicated System

Following the theme of listening and delivering, GripShift has introduced a new American made rear derailleur and dedicated shifter called the ESP 900. By dedicated, we mean that this new derailleur will not work with existing Shimano shifters. Nor will this shifter work with other derailleurs.

Reduced Actuation Ratio

The reason why this is a dedicated system is that it takes about 75% more cable movement for each shift than existing systems. So the shifter pulls more cable, and the derailleur requires more cable pull for each shift.

The reason for this greater amount of cable pull are two fold. First, if more cable moves in the same period of time, friction of the cable is reduced. Second, by moving more cable for the same amount of shift travel the movement of the derailleur can be more precisely controlled. The result is more positive shifting without any extra shifting force required. But that's just part of the story-

Chain Gap Control

The ESP 900 derailleur uses a "coaxial" guide pulley. This means that the upper derailleur pulley is on the same pivot as the derailleur cage. Combined with a steeper parallelogram, this keeps the upper pulley at a more constant distance from the cogs resulting in more precise shifting over the whole cassette range. It also eliminates the need for a "B" pivot spring and thus removes a variable in the shifting system.

Materials Science

GripShift has developed several new derailleur body materials, including a carbon fiber composite with very high strength to weight characteristics. A stiffer extension spring keeps shifting snappy. And along with the new materials, GripShift's 900 derailleur is fully rebuildable, so the rider can expect the derailleur to have a long lifetime with a little maintenance. All pivot pins are serviceable, cleanable, and replaceable.

Other Performance Features


The derailleur body itself has several unique features. These all add to the ESP 900's shifting performance.

The "Turbo Scoop", located at the upper pulley, controls the chain as it moves off the upper pulley onto the cogs. This part is an ultra high molecular weight polyethylene, which eliminates wear of the derailleur body.

The "Fin" controls the derailleur actuation ratio, giving the shifter a powerful mechanical advantage for a very light shift effort.

A special housing stop design is angled to reduce friction and allow the cable to drain. By eliminating the redundant cable tension adjuster on other derailleurs this area is strengthened while reducing weight. After all, there's already one on the shifter!

The ESP derailleur places the upper pulley forward of the cassette. This allows the chain to be led onto the cassette smoothly without a floating pulley for crisper shifts. It also means the chain engages more cog teeth. More engagement is a plus in conditions where the chain may be clogged, like in mud or snow. With more teeth engaged at a given time, there is less wear on each tooth, helping to increase the life of the cogs.

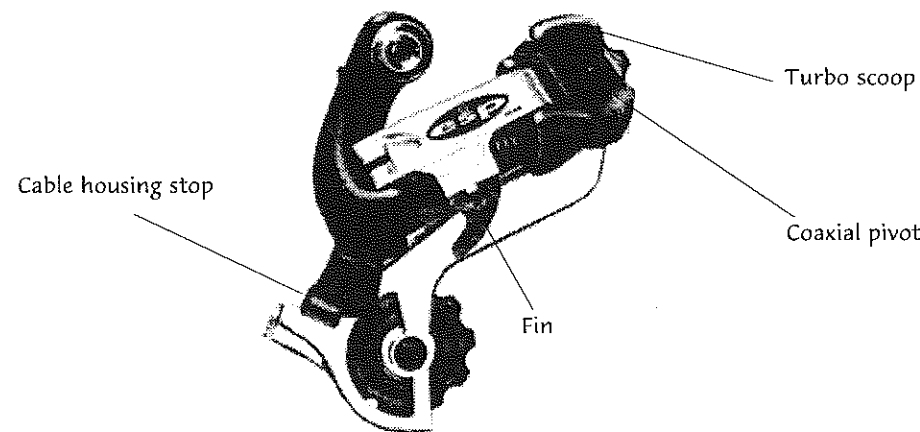

Gary's Eye for Detail



Gary has spent many years cycling, especially off-road. Ridden in lots of different conditions. Over the years, he's learned what works and what doesn't work. Not that Gary is the only one in the world who likes to ride, but Gary also likes to tinker. Lots of people have been in situations where they wondered why their bike didn't completely fulfill their needs. But when faced with such a situation, Gary had the talent and has taken the time to seek answers to the questions left unanswered by others. In fact, that's how he invented Mountain Bikes in the first place, and that's how the Gary Fisher frame design came about.

Gary Fisher accomplishments:

- 1974- Built first mountain bike
- 1984- First production mountain bike with Dura-Ace freehub, toe clips and straps
- 1984- Helped Shimano develop index shifting
- 1988- Introduced Fisher CR-7 mating aluminum main triangle to Cro-Moly stays
- 1989- Developed Evolution frame design and components, starting trend to oversize from 1" standard
- 1991- Developed Mt. Tam, first production mountain bike with front suspension

Gary Fisher designs:

- Ultrashort 16.5 inch chainstays. By tucking the rear wheel in under the rider more than other bikes, Gary's design puts more weight on the rear wheel. Most riders already know that this helps give suction cup climbing. But it also means better rear wheel braking. And allows the rider to move weight off the front wheel easier when lifting it over a ditch or log. The problem with such short stays is wheel and chainring clearance, which Gary solved with his Hipstay design.

- HipStays. By using a special bend in the chainstays, Gary has managed to leave enough room for the rear wheel, but also provide room for the chainrings and a proper chainline.

Steeper angles. One of the hardest parts of mountain bike design is getting the steering right. On the one hand, you want a bike that is rock solid at high speed in the roughest conditions. On the other, you want it nimble at low speeds, and no wheel flop on steep climbs.

These two needs are difficult to balance. By playing with the angles and offset of the bike, combined with the weight distribution, Gary has found the optimum balance.

How did he do it? Gary actually built a fully adjustable bike. Virtually all facets of performance could be tuned, from bottom bracket height to head angles. Then Gary applied his considerable saddle time and 'feel' to find the perfect combination. The result is a bike with steeper angles than most, with a slightly modified trail. Then he took what he had learned and adapted it to his entire line in a whole range of sizes, including small bikes with 24 inch wheels.

In addition to the steering Gary also focused on efficiency on the bike. By using a slightly steeper seat tube than others, the transition from sitting to standing is very smooth on a Fisher bike. This allows the rider to change position without breaking traction, a really important feature in changing terrain.

- Modified top tube lengths. So Gary mastered the mountain bike's technical handling. But at the same time, he wanted his bike to be comfortable. Gary is no stranger to the laid-out aerodynamic position of road bikes, having been one of the best road racers in the U.S. at one time. But off road, Gary wanted to see the sights, and sometimes still pedals for more hours in a day than most folks would consider normal. So he opted for a slightly more upright position than road bikes offer. Through his experimentation, he found top tube lengths which give lots of cockpit room so the rider can move around and balance the bike better in technical terrain.

Its important to note that when comparing top tube lengths, Gary's design will actually ride 'bigger' than others because of the steeper seat tube angles. With a steeper seat tube, the rider does not need to move forward as much when standing to get their weight over the bottom bracket when compared to other designs.

- Cables routed to make things work better. With many bikes, the cable routing is selected mostly to make the bike easier to build. Gary has gone to the extra expense of designing the cable routing with performance first in mind. With smooth lines to all the cables for low friction, slotted stops for easy maintenance, and top tube routing to keep the cables out of the gunk, every Gary Fisher mountain bike will get the most performance possible from the derailleurs and brakes. Gary's attention to detail may not be as noticeable on new bikes, but as the miles roll along and the water, gunk, etc. accumulate, it means that its easy to keep a Fisher bike running like new.

- Bullet housing stops. Its attention to detail that sets Gary's bikes apart. Little things like using tapered and rounded 'bullet' cable stops to prevent snagging of your clothes. There's a lot more common-sense design hidden in the tubing specs, cable stop placement, etc. that all comes from Gary's experience as a rider and the inventor of Mountain Bikes.

- All Gary's bikes are this way. With many manufacturers, you only get their 'best' design when you buy their most expensive bikes. Gary believes that everyone, from first timer to veteran racer, will benefit from his innovations. That's why you'll find these features on Gary's least expensive full sized bike or even on the 24 inch wheeled Tyro and Maniac.

Bike Specs: A Guide

These sections are designed to help the mechanic in the shop as well as the sales person on the floor. We've put just about everything there is to know about each model on a page. You'll also find info to help you size a bike, or better fit a customer by switching to a different model.

Special Notes:

- Headset size- indicates the Stem/Inner head tube/ Fork crown race seat diameters in millimeters and also the stack height. This is the height of a headset when installed in the frame. This dimension is added to head tube length as well as steerer clamp height and spacers for Direct Connect or AheadSet systems to calculate steerer length. Its always better to measure steerer length, or calculate it, than rely solely on the chart's Steerer length.
- Handlebars- Includes width and stem clamp diameter.
- Stem and Stem extension- the length of the stem measured from the center of the handlebars to the centerline of the steerer and stem quill, along the centerline of the stem. Because some stems are horizontal and some stems angled, there are two other stem dimensions to be aware of: reach, the horizontal component of the stem, and rise, the vertical component of the stem. Example: A 100 mm stem with a 25° rise in a bike with a 71° head tube will have a 44° rise when measured from the ground. In the bike this 100 mm stem has a reach of 71 mm and a rise of 71 mm. Also listed is the steerer clamp height of Direct Connect stems, because this effects steerer length. The degrees of rise on each stem size specified.
- Seatpost length- In some cases, long posts will not allow the seatpost to slide entirely down into the frame. If substituting seatposts, please ensure that the new seatpost is measured accurately for diameter.
- Crankset- Lists the chainring bolt hole circle, a dimension which must be matched when replacing chainrings. The number of chainring teeth are listed in the gear chart.
- Bottom Bracket- indicates model, shell width, and axle length of the bottom bracket.
- Front derailleur- indicates the seat tube diameter, or "braze-on type" if the derailleur doesn't use a band or clamp attachment. Also calls out down pull or top pull, as well as Top Swing models which clamp to a different location on the seat tube.
- Hubset type- describes the hub configuration for cassettes, single cogs, or freewheels, and number of gears. Also listed is the O.L.D., or Outer Locknut Dimension, which indicates the width of the hub's axle between the inside dropout faces. The number of teeth on each cog is listed in the gear chart.
- Tire size- Indicates the specified tire's listed size. In most cases, other tire sizes will also fit.
- Spokes- Indicates the number of spokes, length and gauge required.
- Angles and such- They're all listed, size by size. For explanations of the terms, and what they mean to the rider, see page 5.
- Stand over height- the distance from the ground to the top of the top tube, measured in the middle of the top tube.
- Reach- the horizontal distance combining the reach of the stem with the effective top tube. This is a different way of measuring reach than we have used in the past, but a more accurate one.
- Head tube length- original length of head tube. Use this to calculate the steerer length is you need it. Add stack height, head tube length, and stem requirements. Please note that different direct connect stems and spacers require different steerer lengths. This dimension can also be helpful in determining how high the handlebars might be on a given bike model and size.
- Steerer length- Brought back by popular demand, but a caution: If the headset, spacers, or stem spec has been changed since we originally did our calculations, this may be off. A good mechanic will always take the time to check all the components and do their own math. Measure twice, cut once!

Minnosaurus

Our Price: \$ _____

General Specs

| | | | | |
|------------|---------------|-------------------------|--|--------------|
| Frameset | Frame | HiTensile steel | | |
| | Fork | HiTensile steel | | |
| | Headset | Steel | 22.2/ 30.0/ 27.0, 33.0 mm stack height | |
| Controls | Handlebars | Steel | Downhill bend | |
| | Stem | Steel | TIG welded | |
| | Shifters | - | | |
| | Brake levers | - | | |
| | Grips | Kraton | | |
| Saddle | Seatpost | Fisher | "Supersoft" foam | |
| | Seat binder | Steel | Chrome plated | |
| | | Kalloy | M6 x 55 | |
| Brakes | | Coaster | | |
| Drivetrain | Crankset | One piece | 40T | |
| | BB | VP-B35 | 24 TPI | |
| | Pedals | ATB nylon | | |
| | F. derailleur | - | | |
| | R. derailleur | - | | |
| | Rear Cog | 18T | | |
| Wheelset | Chain | KMC 410 | 1/2 x 1/8" | 40 |
| | Hubs | Steel | Sealed, nutted, silver | |
| | Rims | Steel | | 18 45 |
| | Tires | Dinosaur tread | 20 x 1.75 | |
| | Tubes | Schraeder | | |
| | Spokes | Chrome plated | 32 front and rear | |
| | | Front | 187 14ga. | |
| | | Rear- D/ND | 185 14ga. | |
| Weight | | 25.5 lbs. | 11.6 kg | |
| Color | | Boy's- Gloss Royal blue | | |
| | | Girl's- Gloss Pink | | |

Geometry and Fit Specifics

| | | | |
|-----------------------|-------------|----------------|---------------------|
| Sizes | 13 | | |
| Standover height | 702 | | |
| Effective top tube | 27.6 545 | | |
| Reach | 21.5 614 | | |
| Head tube length | 24.2 90 | | |
| Handlebars | 25.4 mm | Width | 540 |
| Stem | 22.2 | Length | 90 |
| | | Degrees rise | 20 |
| | | Insertion | 140 |
| Seatpost | 26.6 mm | Length | 300 |
| Cranks | | Length | 5 1/2" |
| Fork | | Steerer length | 128- 138/girls |
| | | Offset | 40 |
| | | Trail | 83 |
| Head angle | | | 70.0 |
| Seat angle | | | 74.0 |
| Wheelbase | | | 1027 |
| Chainstay length | | | 40.4 430 |
| Bottom bracket height | | | 16.9 281 11.1 |

Minnosaurus Notes

Gary spec'd this little bike for the new Fisher rider. The Minnosaurus uses a special short-bladed fork so that the head tube can be as low as possible. This adds standover clearance without shortening the seat tube. The result is a bike which will fit longer as a child grows, so its a better value for parents.

It uses steel cranks and bolt on wheels because little folks don't take as much time to do their maintenance as older riders.

But even a little Fisher has to be cool, so it has 'downhill' handlebars and Dinosaur treads!

Shortcut

Our Price: \$ _____

General Specs

| | | | | |
|------------|---------------|-------------------------|--|--------------|
| Frameset | Frame | HiTensile steel | | |
| | Fork | HiTensile steel | | |
| | Headset | Steel | 22.2/ 30.0/ 27.0, 33.0 mm stack height | |
| Controls | Handlebars | Steel | "Downhill" bend | |
| | Stem | Steel | TIG welded | |
| | Shifters | GripShift QuickShift 60 | | |
| | Brake levers | Alloy | | |
| | Grips | Kraton | | |
| Saddle | Seatpost | Fisher | "SuperSoft" foam | |
| | Seat binder | Steel | Chrome plated | |
| | | Kalloy | M6 x 55 | |
| Brakes | | Alloy | Cantilevers | |
| Drivetrain | Crankset | One piece | 40T | |
| | BB | VP-B35 | 24 TPI | |
| | Pedals | ATB nylon | | |
| | F. derailleur | - | | |
| | R. derailleur | Shimano Tourney | 14-28 6 speed threaded | |
| | Freewheel | Shimano HG22 | | |
| | Chain | KMC UG50 | | |
| Wheelset | Hubs | Steel | Nutted, sealed, silver | 40 |
| | Rims | Weinmann 519 | | 14 57 |
| | Tires | ATB knobby | 20 x 2.0 | 16 50 |
| | Tubes | Schraeder | | 18 45 |
| | Spokes | Chrome plated | 36 front and rear | 21 38 |
| | | Front | 188 14ga. | |
| | | Rear- D/ND | 185/187 14ga. | 24 33 |
| Weight | | 25.5 lbs. | 11.6 kg | 28 29 |
| Color | | Boy's- Red | | |
| | | Girl's- Dry lavender | | |

Geometry and Fit Specifics

| | | | |
|-----------------------|-------------|----------------|---------------------|
| Sizes | 11.5 | | |
| Standover height | 702 | | |
| Effective top tube | 27.6 545 | | |
| Reach | 21.5 614 | | |
| Head tube length | 24.2 90 | | |
| Handlebars | 25.4 mm | Width | 540 |
| Stem | 22.2 | Length | 90 |
| | | Degrees rise | 20 |
| | | Insertion | 140 |
| Seatpost | 26.6 mm | Length | 300 |
| Cranks | | Length | 5 1/2" |
| Fork | | Steerer length | 132 -142/girls |
| | | Offset | 40 |
| | | Trail | 83 |
| Head angle | | | 70.0 |
| Seat angle | | | 74.0 |
| Wheelbase | | | 1027 |
| Chainstay length | | | 40.4 430 |
| Bottom bracket height | | | 16.9 281 11.1 |

Shortcut Notes

This is basically a geared version of the Minnosaurus. By adding a 6 speed freewheel and QuickShift shifter, the shortcut can tackle more terrain and go further.

Along with this, the Shortcut also gets front and rear cantilever brakes, and knobby tires.

Upgrades from the Minnosaurus

- Weinmann alloy rims
- Knobby tires
- 6 speed w/QuickShift
- Front and rear cantilever brakes

24" Wheel Bikes

For 1996, Gary Fisher's 26 inch-wheeled mountain bikes come in frame sizes as small as 11.5 inches. Still there are riders who need smaller bikes to get the kind of performance Gary intended mountain bikes to offer. Gary's 24 inch wheeled mountain bikes, the Tyro and Maniac, are designed with these riders in mind.

The question is always asked: "Why can't you make my size of bike with 'big' size wheels?". The answer revolves around weight distribution, handling characteristics, and more. But the simplest way to explain the problem is good fit. If the rider needs a short seat tube, they probably also need a short top tube.

The easiest way to get a shorter top tube than that offered on the 11.5 inch Aquila would be to move the front wheel back towards the bottom bracket and decrease the front-center. This would create a problem because the front wheel could then contact the toe clips or the rider's foot when turning at slow speeds.

To avoid toeclip overlap, the alternative method for shortening the top tube would be to use a more laid-back head angle while maintaining the existing front-center. Such a design would have very poor steering characteristics, so is unacceptable.

Another example of the wrong approach to fitting smaller riders: Some companies use a really steep seat tube which allows them to list a shorter top tube. But the rider's position over the pedals is important to cycling efficiency and is relative to the bottom bracket, so moving the seat tube forward doesn't place the rider closer to the handlebars to make the bike fit better, but only serves to fool the uninformed buyer.

The real solution is to use a smaller front wheel so that you can decrease the front center without having toeclip overlap. A smaller front wheel also allows a lower head tube so the handlebars can be moved down to a correct position for good handling.

As long as you're going to use a smaller front wheel, you should also use that size in the rear so that the rider doesn't have to carry two sizes of tubes in their bike's seat bag. This also allows the whole bike to be redesigned to be fully proportionate for the smaller rider with shorter chainstays and wheelbase. By making this change, Gary's small bikes will have the same feel under a small rider that Gary's bigger bikes offer to the bigger rider. The gearing has even been modified to provide appropriate gear ratios.

Gary feels very strongly that every Gary Fisher bike should handle and ride the way Gary himself would want it. The beginning mountain biker should have the equipment with the same capabilities as the professional racer because it makes off-road riding easier for both of them. Granted, the Procaliber Ltd. is lighter, but the Tyro can be ridden in the same terrain.

So who will fit these smaller bikes? Since the standover of a Tyro is 25.2 inches, we'd expect that someone from the low-to-mid four foot range up to someone around 5 feet would best be served by a Tyro or Maniac. Since the wheelbase is about an inch shorter than Gary's 'big' bikes, the smaller rider will get a quicker handling bike more appropriate for their smaller size. With the shorter chainstays, they will have more weight over the rear wheel for improved traction in climbing and braking. And by being more 'on top' of the bike, they will be able to better handle the bike in technical terrain. With the right size bike, they can experience the same thrill as Gary does on his own Fisher.

Tyro

Our Price: \$ _____

General Specs

| | | | | | |
|------------|---------------|--------------------------|--|----|----------|
| Frameset | Frame | HiTensile steel | | | |
| | Fork | HiTensile steel | 22.2/30.0/27.0, 33.0 mm stack height | | |
| Controls | Headset | Steel | | | |
| | Handlebars | Steel | | | |
| | Stem | Steel | TIG welded | | |
| | Shifters | GripShift QuickShift 60 | | | |
| | Brake levers | Alloy | | | |
| | Grips | Kraton | | | |
| Saddle | | Fisher | "SuperSoft" foam | | |
| | Seatpost | Steel | Chrome plated | | |
| | Seat binder | | M6 x 23.5 | | |
| Brakes | | Alloy | Cantilever | | |
| Drivetrain | Crankset | SR | Riveted rings | | |
| | BB | YST BB613 | | | |
| | Pedals | ATB nylon | | | |
| | F. derailleur | Shimano Tourney | Down pull, 28.6 mm / 1 ¹ / ₈ " | | |
| | R. derailleur | Shimano Tourney | | | |
| | Freewheel | Shimano HG22 | 6 speed, threaded | | |
| | Chain | KMC UG50 | | | |
| Wheelset | Hubs | Alloy | Nutted f & r, threaded, 135 mm O.L.D. | | |
| | Rims | Weinmann 519 | | | |
| | Tires | Kenda | Blackwall, 24 x 2.0 | | |
| | Tubes | Schraeder | | | |
| | Spokes | Chrome plated | 36 front and rear | 14 | -- 64 81 |
| | | Front | 239 15ga. | 16 | 41 56 71 |
| | | Rear- D/ND | 236/238 15ga. | 18 | 37 50 63 |
| Weight | | 27.4 lbs. | 12.4 kg | 21 | 31 43 54 |
| Color | | Boy's- Gloss Bright Blue | | 24 | 28 37 47 |
| | | Girl's- Dry Magenta | | 28 | 24 32 -- |

Geometry and Fit

| | | | |
|-----------------------|---------|----------------|------|
| Size | 11.5 | | |
| Standover height | 640 | | |
| | 25.2 | | |
| Effective top tube | 525 | | |
| | 20.7 | | |
| Reach | 601 | | |
| | 23.7 | | |
| Head tube length | 85 | | |
| Handlebars | 25.4 mm | Width | 540 |
| Stem | 22.2 mm | Length | 105 |
| | | Degrees rise | 24 |
| | | Insertion | 135 |
| Seatpost | 26.6 mm | Length | 300 |
| Cranks | | Length | 165 |
| Fork | | Steerer length | 123 |
| | | Offset | 38 |
| Trail | | | 68 |
| Head angle | | | 70.5 |
| Seat angle | | | 74.5 |
| Wheelbase | | | 981 |
| | | | 38.6 |
| Chainstay length | | | 394 |
| | | | 15.5 |
| Bottom bracket height | | | 277 |
| | | | 10.9 |

Tyro Notes

The Tyro is for small folks who want a real mountain bike, not just a cut-down big bike. Smaller wheels allow a shorter top tube for better fit and correct weight distribution over the wheels. This give the Tyro great handling and excellent traction. And the gearing is specially set up for the smaller wheels.

The Tyro's compact fork design allows a lower top tube, which means more standover height. The extra standover means more 'growing room' so a bike will fit over a longer period of time.

Along with a well thought out frame design, the Tyro has special spec to make mountain bike riding easier and more fun for smaller folks. Narrow bars, shorter cranks, adjustable reach brake levers, and GripShift QuickShift 60 shifters all add up to a better fitting mountain bike that will help small riders learn to love the dirt. And another parent pleaser is the nutted hubs, which take the worry out of wheel attachment.

Maniac

General Specs

Our Price: \$ _____

| | | | | | | |
|------------|---------------|-------------------------|--|--|-----------|---------------------|
| Frameset | Frame | HiTensile steel | Elastomer/coil spring suspension, 38 mm travel | | | |
| | Fork | SR DuoTrack 7006 | 22.2/30.0/27.0, 33.0 mm stack height | | | |
| Controls | Headset | Steel | | | | |
| | Handlebars | Steel | TIG welded | | | |
| | Stem | Steel | | | | |
| | Shifters | GripShift QuickShift 60 | | | | |
| | Brake levers | Alloy | | | | |
| | Grips | Kraton | | | | |
| Saddle | | Fisher | "SuperSoft" foam | | | |
| | Seatpost | Steel | Chrome | | | |
| | Seat binder | Cro-Moly | M6 x 23.5 | | | |
| Brakes | | Alloy | Cantilevers | | | |
| Drivetrain | Crankset | SR | Riveted rings | | | |
| | BB | YST BB-613 | | | | |
| | Pedals | ATB nylon | Down pull, 28.6 mm / 1 ^{1/8} " | | | |
| | F. derailleur | Shimano Tourney | | | | |
| | R. derailleur | Shimano Tourney | | | | |
| | Freewheel | Shimano HG22 | 6 speed | | | |
| | Chain | KMC UG50 | | | | |
| Wheelset | Hubs | Alloy | Nutted f & r, threaded, 135 mm O.L.D. | | | |
| | Rims | Weinmann 519 | | | | |
| | Tires | Kenda | Blackwall, 24 x 2.0 | | 28 | 38 48 |
| | Tubes | Schraeder | | | 14 | -- 64 81 |
| | Spokes | Chrome plated | 36 front and rear | | 15 | 41 56 71 |
| | | Front | 239 15ga. | | 18 | 37 50 63 |
| | | Rear- D/ND | 236/238 15ga. | | 21 | 31 43 54 |
| Weight | | 27.9 lbs. | 17.4 kg | | 21 | 31 43 54 |
| Color | | Dry Purple | | | 24 | 28 37 47 |
| | | | | | 28 | 24 32 -- |

Geometry and Fit

| | | | |
|-----------------------|---------|----------------|------|
| Size | 11.5 | | |
| Standover height | 640 | | |
| | 25.2 | | |
| Effective top tube | 525 | | |
| | 20.7 | | |
| Reach | 612 | | |
| | 24.1 | | |
| Head tube length | 85 | | |
| Handlebars | 25.4 mm | Width | 540 |
| Stem | 22.2 mm | Length | 105 |
| | | Degrees rise | 24 |
| | | Insertion | 135 |
| Seatpost | 26.6 mm | Length | 300 |
| Cranks | | Length | 165 |
| Fork | | Steerer length | 119 |
| | | Offset | 37 |
| Trail | | | 69 |
| Head angle | | | 70.5 |
| Seat angle | | | 74.5 |
| Wheelbase | | | 981 |
| | | | 38.6 |
| Chainstay length | | | 394 |
| | | | 15.5 |
| Bottom bracket height | | | 277 |
| | | | 10.9 |

Maniac Notes

The Maniac shares the fit and performance concepts of the Tyro except its suspension ready, so the steering is correct with the SR DuoTrack suspension fork. Suspension adds comfort to the ride. More comfort means less fatigue, better bike control, and more hours of fun on the trail. Standover is slightly different because the suspension fork requires that the head tube be higher of the longer fork length.

Upgrades from the Tyro

SR DuoTrack 7006

Our Price: \$ _____

Wahoo

General Specs

| | | | | | | |
|------------|---------------|------------------------------|--|--|--|-------------------------------|
| Frameset | Frame | Cro-Moly main tubes | HiTensile stays | | | |
| | Fork | Cro-Moly | | | | |
| | Headset | Steel | 25.4/34.0/30.0, 35.0 mm stack height | | | |
| Controls | Handlebars | Steel | | | | |
| | Stem | Steel | | | | |
| | Shifters | GripShift MRX-100 | | | | |
| | Brake levers | Alloy | | | | |
| | Grips | Kraton | | | | |
| Saddle | | Fisher | "Supersoft" foam | | | |
| | Seatpost | Aluminum alloy | Micro-adjust | | | |
| | Seat binder | Kalloy | M6 x 55 quick release | | | |
| Brakes | | Shimano Altus CT91 | | | | |
| Drivetrain | Crankset | Shimano Altus CT91 | Riveted rings | | | |
| | BB | Shimano BB-CT91 | 68x116 | | | |
| | Pedals | ATB nylon | Down pull, 28.6 mm / 1 ^{1/8} " | | | |
| | F. derailleur | Shimano Altus CT91 | | | | |
| | R. derailleur | Shimano Acera-X | | | | |
| | Cassette | Shimano HG30 | 7 speed | | | |
| | Chain | KMC UG50 | | | | |
| Wheelset | Hubs | Alloy QR | Compact HyperGlide cassette, 135 mm O.L.D. | | | |
| | Rims | Weinmann 519 or Rigida AS 26 | | | | |
| | Tires | Kenda | 26 x 1.95 | | | 24 32 38 |
| | Tubes | Schraeder | | | | 11 -- 76 91 |
| | Spokes | Chrome plated | 36 front and rear | | | 13 48 65 77 |
| | | Front | 265 15ga. | | | 15 42 56 66 |
| | | Rear- D/ND | 261/263 15ga. | | | 18 35 47 55 |
| Weight | | 28.2 lbs. | 12.8 kg | | | 18 35 47 55 |
| Color | | Wild Cherry | | | | 21 30 40 47 |
| | | Titanium | | | | 24 26 35 42 |
| | | | | | | 28 22 30 -- |

Geometry and Fit

| | 13 | 15.5 | 16.75 | 18 | 19.5 | 15.5W | 18W |
|-----------------------|---------|---------|---------|---------|---------|---------|---------|
| Size | 703 | 751 | 767 | 784 | 815 | 639 | 660 |
| Standover height | 27.7 | 29.6 | 30.2 | 30.9 | 32.1 | 25.2 | 26.0 |
| Effective top tube | 540 | 554 | 568 | 583 | 597 | 551 | 580 |
| | 21.3 | 21.8 | 22.4 | 23.0 | 23.5 | 21.7 | 22.8 |
| Reach | 614 | 630 | 652 | 662 | 685 | 619 | 640 |
| | 24.2 | 24.8 | 25.7 | 26.1 | 27.0 | 24.4 | 25.2 |
| Head tube length | 90 | 90 | 90 | 100 | 140 | 120 | 165 |
| Handlebars | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm |
| Stem | 25.4 | 25.4 | 25.4 | 25.4 | 25.4 | 25.4 | 25.4 |
| | 105 | 105 | 115 | 130 | 145 | 90 | 105 |
| | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| | 155 | 155 | 155 | 155 | 155 | 155 | 155 |
| | 155 | 155 | 155 | 155 | 155 | 155 | 155 |
| Seatpost | 300 | 300 | 350 | 350 | 350 | 250 | 300 |
| Cranks | 170 | 170 | 170 | 170 | 170 | 170 | 170 |
| Fork | 123 | 143 | 163 | 183 | 203 | 143 | 183 |
| | 38 | 38 | 38 | 38 | 38 | 38 | 38 |
| | 74 | 74 | 71 | 71 | 71 | 74 | 71 |
| | 71 | 71 | 71.5 | 71.5 | 71.5 | 71 | 71.5 |
| Head angle | 74.5 | 74 | 74 | 73.5 | 73.5 | 74 | 73.5 |
| Seat angle | 101.4 | 102.5 | 103.7 | 104.8 | 106.3 | 101.9 | 104.6 |
| Wheelbase | 39.9 | 40.4 | 40.8 | 41.3 | 41.9 | 40.1 | 41.2 |
| Chainstay length | 420 | 420 | 420 | 420 | 420 | 420 | 420 |
| | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 |
| Bottom bracket height | 288 | 288 | 292 | 292 | 292 | 291 | 295 |
| | 11.3 | 11.3 | 11.5 | 11.5 | 11.5 | 11.5 | 11.6 |

Wahoo Notes

The most affordable Fisher 'full size' mountain bike in the '96 line. Unlike many bikes in this price range, the Wahoo is a real mountain bike. Its not a modified city bike, but full Fisher geometry. We use Cro-Moly tubes where the thinner walls will yield the most improvement in ride- the main triangle and fork. The Wahoo has an 1^{1/8}" headset for more steering rigidity. Still, this bike fits the 'recreational' category, so we offer the Wahoo in a step-through, or women's, frame style.

Marlin

General Specs

| | | | |
|------------|---------------|--------------------|--|
| Frameset | Frame | Cro-Moly | |
| | Fork | Cro-Moly | |
| | Headset | Steel | 25.4/34.0/30.0, 35.0 mm stack height |
| Controls | Handlebars | Steel | |
| | Stem | Steel | TIG welded, black |
| | Shifters | GripShift SRT-300 | |
| | Brake levers | Alloy | |
| | Grips | Kraton | |
| Saddle | | Fisher | "SuperSoft" foam |
| | Seatpost | Aluminum alloy | Micro-adjust |
| | Seat binder | Kalloy | M6 x 55 quick release |
| Brakes | | Shimano Altus C91 | |
| Drivetrain | Crankset | Shimano Acera-X | Riveted rings |
| | BB | Shimano BB-LP26 | 73/113 |
| | Pedals | ATB nylon | Cro-Moly spindles |
| | F. derailleur | Shimano Acera-X | Top Swing, top pull, 28.6 mm / 1 1/8" |
| | R. derailleur | Shimano Alivio | |
| | Cassette | Shimano HG30 | 7 speed |
| | Chain | KMC HG50 | |
| Wheelsset | Hubs | Alloy QR | HyperGlide Compact cassette, 135 mm O.L.D. |
| | Rims | Weinmann 519 | |
| | Tires | Tioga Psycho KS/TS | 26 x 1.95 |
| | Tubes | Schraeder | 11 -- 81 100 |
| | Spokes | Stainless | 13 48 69 85 |
| | | Front | 15 42 59 73 |
| | | Rear- D/ND | 18 35 50 61 |
| Weight | | 27.9 lbs. | 21 30 42 52 |
| Color | | Gloss Emerald | 24 26 37 46 |
| | | Slate | 28 22 32 -- |

Geometry and Fit

| Sizes | 13 | 15.5 | 16.75 | 18 | 19.5 |
|-----------------------|---------|----------------|-------|------|------|
| Standover height | 703 | 751 | 767 | 784 | 815 |
| | 27.7 | 29.6 | 30.2 | 30.9 | 32.1 |
| Effective top tube | 540 | 554 | 568 | 583 | 597 |
| | 21.3 | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | 615 | 646 | 668 | 696 | 722 |
| | 24.2 | 25.4 | 26.3 | 27.4 | 28.4 |
| Head tube length | 85 | 105 | 125 | 145 | 165 |
| Handlebars | 25.4 mm | Width | 560 | 560 | 560 |
| Stem | 25.4 mm | Length | 90 | 105 | 120 |
| | | Degrees rise | 10 | 10 | 15 |
| | | Insertion | 140 | 140 | 165 |
| Seatpost | 26.6 mm | Length | 300 | 350 | 350 |
| Cranks | | Length | 170 | 175 | 175 |
| | | Steerer length | 121 | 141 | 161 |
| | | Offset | 29 | 29 | 28 |
| | | Trail | 74 | 74 | 71 |
| Head angle | | | 71 | 71 | 71.5 |
| Seat angle | | | 74.5 | 74 | 74 |
| Wheelbase | | | 1014 | 1025 | 1037 |
| | | | 39.9 | 40.4 | 40.8 |
| Chainstay length | | | 420 | 420 | 420 |
| | | | 16.5 | 16.5 | 16.5 |
| Bottom bracket height | | | 288 | 288 | 292 |
| | | | 11.3 | 11.3 | 11.5 |

Marlin Notes

The Marlin's full Cro-Moly frame is light and stronger than one of HiTensile steel, so less steel is needed. The result is lighter tubing with more liveliness, but with no sacrifice in strength. Full Fisher geometry compliments the higher quality frame tubing for an outstanding ride. Wider gearing from the 24/34/42 chainrings make it easier to tackle steeper terrain.

Upgrades from Wahoo

| | |
|--|---|
| Full Cro-Moly frame | GripShift SRT-300 shifters |
| Acera-X chainrings w/ wider and higher gearing | Acera-X front and Alivio rear derailleurs |
| Tioga Psycho tires, with drive and steering specific tread | Cro-Moly pedal spindles |
| Stainless steel spokes | |

High End Cro-Moly Steel

For 1996, even more of the Fisher line is built in the U.S., and Gary is very proud of this. There are a lot of reasons, best generalized as Quality, Jobs, Attention to Detail, and Less Environmental Impact.

Quality

Most of Gary's bikes are now being built in the U.S., and Gary really likes the quality that this produces. Gary knows his designs require extra work to get the geometry the way he wants it. His angles and tube lengths are different, requiring different jigs and fixtures. He wants better quality welds than those offered by most manufacturers. He wants his dropouts brazed, rather than welded, so they can be replaced or repaired if necessary. And he wants different tube dimensions and butting than usual. Its a long list, and Gary expects things to be just how he wants them.

High Tech Welding

Many bikes are TIG welded, which means that while an electric arc from a Tungsten welding tip brings the frame tubes to their melting point, an Inert Gas is flowed over the red-hot part of the molten frame tubes. This gas keeps oxygen from combining chemically with the steel, which would weaken the frame. When the molten steel cools, the tube joint become a solid, single piece. But Gary Fisher's process makes for a better quality welded bike.

First Gary designs the geometry of the bike. Then, working with True Temper, the high quality American Cro-Moly tubing manufacturer, he specs the tubing. This includes special tube sizes and thicknesses. Radical butting. Good stiffness and strength to weight ratios. Stuff that makes Gary Fisher bikes stronger and ride better, but keeps them light.

That's just the start. For accurate welded frames, the tubing lengths and miters should be really exact. Miters are the funny looking curves cut into the tubing ends to make two tubes fit together smoothly. If a miter is done right, the frame is more accurate and the frame joint is stronger.

Most factories use a punch or a mill to miter their tubes. Either one leaves sharp, ragged edges to the tube, and as the cutter wears, its not as accurate so the tube lengths can vary. The miters in Gary's U.S. Cro-Moly bikes are cut with a laser, so the tubing is cut with a beam of light. It never wears, and because its controlled by a computer its really accurate.

Also, the tube is always cut at a 90° angle to the tube wall, so its always got a thick edge for better welding. When you weld, you actually melt the tube a bit. After it cools the melted portions are like one piece. If you welded the thin, feathered edge of a machine miter, it won't be as strong as welding the entire thickness of the tubing wall. With laser mitering, the welder always works with an edge as thick as the entire tubing wall. Also, the 90° edge makes a little gap that lets heat penetrate into the joint better. Better heat penetration means a more complete weld, and that means more frame strength.

Another technique adding quality to Gary's bikes is the use of size specific jigs. A jig is a special device that holds the tubing in place while you weld it. Other factories use adjustable jigs so that they can build more models and brands of bikes, without having a lot of money tied up in jigs. But when you adjust them, there's a lot of error possible. With Gary's size specific jigs, every frame that comes down the line is exactly like the last one, because you can't change the jig. With this system, you never see frames with the wrong angles or dimensions.

Then its time to do the welding. Each Gary Fisher frame is sequentially welded by hand. When you apply high heat to a metal, it tends to warp, sort of like the way a cookie sheet twists and pops in the oven. By following a special order, or sequence, of welds as the frame is assembled the warping is controlled by making the frame pull itself back into alignment. Its time consuming, but with the lightweight tubing Gary specs, you don't want to do a lot of cold setting to the frames. Also, remember the part of TIG where you keep the oxygen away from the molten steel? By only doing part of each joint and letting it cool while the gas flows over it, the welder does a better job of keeping the oxygen away from the red hot weld zone. If you went all the way around each joint with your welder, some material would still be red hot when exposed to the oxygen in the air.

After one of the welders has completed a frame, he or she stamps their initials into the bottom bracket shell. That's so we can monitor their work. Every single frame that comes from the welders is checked for alignment on an optical alignment table, plus they're also checked thoroughly for uniformity and good looks. This is basically the same thing a high quality custom builder would do.

But after this visual check, we go the extra mile to guarantee frame quality. Frames are randomly checked throughout every shift with dye penetrant testing and even X-Ray. These special procedures show up things you can't see with the naked eye. If there's ever a problem, every frame done by a particular welder can be checked more thoroughly, because their initials are on the bottom bracket shell as well as the quality control card we keep for every frame.

True Temper Tubing

Although all Gary's U.S. Cro-Moly bikes share the same geometry and similar manufacturing techniques, the high end models have extra hidden features which are important to your customer's riding enjoyment.

The Aquila and Hoo Koo E Koo use triple butted True Temper tubing in their frames. By using a thin tube with ends that are thicker, material can be removed in low stress zones like the middle of the tube. Less material means less weight, but also allows the bike to feel more lively and shock absorptive. The thick ends add strength near the joints where there is greater stress, and also leave more material for a beefier weld.

Tassajara

Our Price: \$ _____

General Specs

| | | | |
|------------|---------------|--------------------|--|
| Frameset | Frame | Cro-Moly | Double-butted |
| | Fork | Cro-Moly | |
| | Headset | Steel | 25.4/34.0/30.0, 34.0 mm stack height |
| Controls | Handlebars | Aluminum alloy | |
| | Stem | Cro-Moly | |
| | Shifters | GripShift SRT-400 | |
| | Brake levers | Alloy | |
| | Grips | Kraton | |
| Saddle | | Fisher | "SuperSoft" foam |
| | Seatpost | Aluminum alloy | Micro-adjust |
| | Seat binder | Kalloy | M6 x 55 quick release |
| Brakes | | Shimano Acera-X | |
| Drivetrain | Crankset | Shimano Alivio | 67 mm bolt hole circle |
| | BB | Shimano BB-LP26 | 73/113 |
| | Pedals | Resin | Clips and straps |
| | F. derailleur | Shimano Acera-X | Top Swing, top pull, 28.6 mm / 1 ^{1/8"} |
| | R. derailleur | Shimano STX SGS | Long cage |
| | Cassette | Shimano IG51 | 7 speed |
| | Chain | KMC IG31 | |
| Wheelset | Hub, rear. | Shimano Acera-X | HyperGlide Compact cassette, 135 mm O.L.D. |
| | front | Alloy | |
| | Rims | Weinmann 519 | |
| | Tires | Tioga Psycho KS/TS | 26 x 1.95 |
| | Tubes | Presta | |
| | Spokes | Stainless | 32 front and rear |
| | | Front | 268 15ga. |
| | | Rear- D/ND | 265/267 15ga. |
| Weight | | 28.8 lbs. | 13.1 kg |
| Color | | Matte Copper | |
| | | Ballistic Blue | |

The X-Caliber and X-Caliber RX feature heat treated, triple butted OXIII tubing. Heat treating increases the strength of the steel so a lighter bike can be made of similar strength.

Gary's top of the line U.S. Cro-Moly bikes, starting with the Aquila, also have hidden features, like internal reinforcements in the head tube and seat tube to reinforce these critical areas while allowing the use of really light weight and oversize tubing. Seat stays are butted so that there is more material under the cantilever bosses, giving the brakes on Gary's bikes extra stopping power. The rear dropouts have a special shape so that the stays don't have to be crimped or dented at the dropout. The list goes on.

The Benefits of Steel

Although newer "high-tech" materials seem to do a better job attracting media attention, steel has a well deserved reputation as the king of bicycle tubing. Steel has been used for bikes since their first invention. Its durable and reliable. Its easy to work by cutting, drilling, filing, welding, bending, brazing, etc. And using steel allows fabrication of a structure which is strong and stiff.

The only place steel gives any advantage to these new materials is in the weight department. The density of steel is greater than aluminum or titanium, and especially compared to carbon composite.

New steel alloys, like Cro-Moly, and heat treated steels have helped some. HiTensile steel, Cro-Moly steel, and heat treated versions of Cro-Moly steel all have about the same modulus, or stiffness. Some steel alloys are stiffer, but aren't being used for bicycles because they may be brittle, or other reasons. The real difference between HiTensile steel and Cro-Moly is the strength.

By using Cro-Moly you can increase a bike's strength, and with stronger material less is required. This helps steel bikes in two ways. First, you can reduce the weight. Second, since less material is required, you can remove some of the stiffness of the frame because a good steel frame is already more than stiff enough. This adds to the liveliness and shock absorption. These are similar advantages as those gained by double or triple butting the tubes: Less weight and a more lively ride.

New for '96

The Fisher high-end steel bikes have recieved close scrutiny from Gary and our team of engineers. And we've spent a whole year listening to feedback from consumers and dealers to hear what they want. The result is several changes to increase the ride quality and fit of our steel bikes.

Fit changes: We heard from many riders that they would prefer a shorter head tube which would allow a lower handlebar position if desired. This change has been made, but at the same time we added Aheadset spacers so those preferring a higher position have not lost any adjustment.

Ride changes: By changing tubing diameters on our high-end steel bikes, we've increased strength, reduced weight slightly, and at the same time increased the ride quality. The changes are as follows: We decreased the top tube diameter from 31.8 mm to 30 mm. At the same time we increased the down tube diameter from 31.8 mm to 33 mm. This change also adds some bottom bracket torsional stiffness for really excellent pedal response when you're jamming up a hill or sprinting.

Aquila frame weight, 17.5": 2350 gm - 5.17 pounds

X-Caliber frame weight, 17.5": 2130 gm - 4.69 pounds

Geometry and Fit

| Sizes | 13 | 15.5 | 16.75 | 18 | 19.5 | | | | |
|-----------------------|---------|-----------------|-------|------|------|------|------|-----------|---------------------|
| Standover height | 703 | 751 | 767 | 784 | 815 | | | | |
| | 27.7 | 29.6 | 30.2 | 30.9 | 32.1 | | | 22 | 32 42 |
| Effective top tube | 540 | 554 | 568 | 583 | 597 | | | 11 | -- 76 100 |
| | 21.3 | 21.8 | 22.4 | 23.0 | 23.5 | | | 13 | 44 65 85 |
| Reach | 615 | 646 | 668 | 696 | 722 | | | 15 | 38 56 73 |
| | 24.2 | 25.4 | 26.3 | 27.4 | 28.4 | | | 18 | 32 47 61 |
| Head tube length | 105 | 125 | 145 | 165 | | | | 18 | 32 47 61 |
| Handlebars | 25.4 mm | Width | 560 | 560 | 560 | 560 | | 21 | 27 40 52 |
| Stem | 25.4 mm | Length | 90 | 105 | 120 | 135 | 150 | 21 | 27 40 52 |
| | | Degrees rise | 10 | 10 | 15 | 15 | 15 | 24 | 24 35 46 |
| | | Insertion | 140 | 140 | 165 | 165 | 165 | 28 | 21 30 -- |
| Seatpost | 26.6 mm | Length | 300 | 350 | 350 | 350 | 350 | | |
| Cranks | | Length | 170 | 175 | 175 | 175 | 175 | | |
| | | Toe clip length | M | M | L | L | L | | |
| Fork | | Steerer length | 121 | 141 | 161 | 181 | 201 | | |
| | | Offset | 29 | 29 | 28 | 28 | 28 | | |
| | | Trail | 74 | 74 | 71 | 71 | 71 | | |
| Head angle | | | 71 | 71 | 71.5 | 71.5 | 71.5 | | |
| Seat angle | | | 74.5 | 74 | 74 | 73.5 | 73.5 | | |
| Wheelbase | | | 1014 | 1025 | 1037 | 1048 | 1063 | | |
| | | | 39.9 | 40.4 | 40.8 | 41.3 | 41.9 | | |
| Chainstay length | | | 420 | 420 | 420 | 420 | 420 | | |
| | | | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | | |
| Bottom bracket height | | | 288 | 288 | 292 | 292 | 292 | | |
| | | | 11.3 | 11.3 | 11.5 | 11.5 | 11.5 | | |

Tassajara Notes

The Tassajara is for the more serious recreational rider, so we focused on saving weight. Start with a double butted Cro-Moly frame, which also adds ride quality.

It also has Shimano's IG, or Interactive Glide system for smooth, 'shockless' shifting both up and down the cassette or chainrings. The Alivio crank has a 22/32/42 combination for lower gear ranges so terrain is easier to tackle for the more serious rider. Complemented by the toe clips and straps.

Upgrades from the Marlin

| | |
|------------------------------|--|
| Double butted Cro-Moly frame | GripShift SRT-400 |
| Alloy bars and Cro-Moly stem | Alivio cranks with bolted on chainring set |
| Toe clips and straps | Acera-X brakes |

Mamba

Our Price: \$ _____

General Specs

| | | | | |
|------------|---------------|--------------------|--|---------------------|
| Frameset | Frame | Cro-Moly | Double-butted | |
| | Fork | Rock Shox Quadra 5 | Elastomer suspension | |
| | Headset | Steel | 25.4/34.0/30.0, 34.0 mm stack height | |
| Controls | Handlebars | Aluminum alloy | | |
| | Stem | Cro-Moly | | |
| | Shifters | GripShift SRT-400 | | |
| | Brake levers | Alloy | | |
| | Grips | Kraton | | |
| Saddle | Seatpost | Fisher | "SuperSoft" foam | |
| | Seat binder | Aluminum alloy | Micro-adjust | |
| Brakes | | Kalloy | M6 x 55 quick release | |
| Drivetrain | Crankset | Shimano Acera-X | 67 mm bolt hole circle | |
| | BB | Shimano Alivio | 73/113 | |
| | Pedals | Shimano BB-LP26 | Clips and straps | |
| | F. derailleur | Resin | Top Swing, top pull, 28.6 mm / 1 1/8" | |
| | R. derailleur | Shimano Acera-X | Long cage | |
| | Cassette | Shimano STX SGS | 7 speed | |
| | Chain | Shimano IG51 | | |
| Wheelset | Hub, rear | KMC IG31 | HyperGlide Compact cassette, 135 mm O.L.D. | |
| | front | Shimano Acera-X | Oversize axle | 22 32 42 |
| | Rims | Alloy | | 11 -- 76 100 |
| | Tires | Weinmann 519 | 26 x 1.95 | 13 44 65 85 |
| | Tubes | Tioga Psycho KS/TS | | 15 38 56 73 |
| | Spokes | Presta | 32 front and rear | 18 32 47 61 |
| | | Stainless | Front | 21 27 40 52 |
| | | Front | 268 15ga. | 24 24 35 46 |
| | | Rear- D/ND | 265/267 15ga. | 28 21 30 -- |
| Weight | | 27.0 lbs | | |
| Color | | Black Sable | | |

Geometry and Fit

| Sizes | 13 | 15.5 | 16.75 | 18 | 19.5 |
|-----------------------|------|------|-------|------|------|
| Standover height | 711 | 756 | 770 | 790 | 822 |
| Effective top tube | 28.0 | 29.8 | 30.3 | 31.1 | 32.4 |
| Reach | 540 | 554 | 568 | 583 | 597 |
| Head tube length | 21.3 | 21.8 | 22.4 | 23.0 | 23.5 |
| Handlebars | 615 | 646 | 668 | 696 | 722 |
| Stem | 24.2 | 25.4 | 26.3 | 27.4 | 28.4 |
| Width | 85 | 105 | 125 | 145 | 165 |
| Length | 560 | 560 | 560 | 560 | 560 |
| Degrees rise | 90 | 105 | 120 | 135 | 150 |
| Insertion | 10 | 10 | 15 | 15 | 15 |
| Seatpost | 140 | 140 | 165 | 165 | 165 |
| Crankset | 300 | 350 | 350 | 350 | 350 |
| Fork | 170 | 175 | 175 | 175 | 175 |
| Trail | M | M | M | L | L |
| Head angle | 119 | 139 | 159 | 179 | 199 |
| Seat angle | 38 | 38 | 38 | 38 | 38 |
| Wheelbase | 74 | 74 | 71 | 71 | 66 |
| Chainstay length | 71 | 71 | 71.5 | 71.5 | 71.5 |
| Bottom bracket height | 74.5 | 74 | 74 | 73.5 | 73.5 |
| | 1016 | 1028 | 1040 | 1051 | 1065 |
| | 40.0 | 40.5 | 40.9 | 41.4 | 41.9 |
| | 420 | 420 | 420 | 420 | 420 |
| | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 |
| | 291 | 288 | 292 | 292 | 292 |
| | 11.5 | 11.3 | 11.5 | 11.5 | 11.5 |

Mamba Notes

This is a suspended version of the Tassajara. The Quadra 5 fork adds comfort to the ride. With suspension, the rider can relax while the front wheel does the up and down moving over bumps. This means less energy is used by the rider so they feel less fatigue at the end of a ride. Also it means that the front wheel stays on the ground more for better control in steering and braking. The oversize front axle adds steering rigidity to this fork. Of course, what that comfort really does is lets you go farther and faster. For more fun!

Upgrades from the Tassajara
 Rock Shox Quadra 5 Suspension front axle

Aquila

Our Price: \$ _____

General Specs

| | | | |
|------------|---------------|-----------------------|--|
| Frameset | Frame | True Temper | Triple-butted Cro-Moly |
| | Fork | Cro-Moly | 25.4/34.0/30.0, 33.4 mm stack height |
| | Headset | Tange Seiki Passage | |
| Controls | Handlebars | Aluminum alloy | |
| | Bar ends | Fisher Fishsticks | |
| | Stem | Cro-Moly | Alloy wedge |
| | Shifters | GripShift SRT-400 | w/reach adjusters |
| | Brake levers | Dia-Compe PC-7N | |
| | Grips | Kraton | |
| Saddle | Seatpost | Bontrager Plus 10 | Micro-adjust |
| | Seat binder | Alloy | 31.8 mm clamp w/integral QR |
| Brakes | | Fisher Steel | |
| Drivetrain | Crankset | Shimano Alivio | SS3 chainrings, 58/94 mm bolt hole circle |
| | BB | Sugino Impel 300 | 73/113 |
| | Pedals | Shimano BB-LP26 | Steel cage, clips and straps |
| | F. derailleur | Resin | Top Swing, top pull, 31.8 mm / 1 1/8" |
| | R. derailleur | Shimano Alivio | Long cage |
| | Cassette | Shimano STX SGS | 7 speed |
| | Chain | Shimano STX | |
| Wheelset | Hub, rear | Shimano IG31 | Compact HyperGlide cassette, 135 mm O.L.D. |
| | front | Shimano Alivio | Oversize axle |
| | Rims | Alloy | 20 32 42 |
| | Tires | Matrix Lobo | Welded, machined, brushed |
| | Tubes | Tioga Psycho KS/TS | 26 x 1.95, racing tread, steel bead |
| | Spokes | Presta | 11 -- 76 100 |
| | | DT or Union Stainless | 32 front and rear |
| | | Front | 269 15ga. |
| | | Rear- D/ND | 267/268 15ga. |
| Weight | | 26.7 lbs. | 12.1 kg |
| Color | | Matte Violet | 21 25 40 52 |
| | | Matte White | 24 22 35 46 |
| | | | 28 19 30 -- |

Geometry and Fit

| Sizes | 11.5 | 15.5 | 16.75 | 18 | 19.5 |
|-----------------------|------|------|-------|------|------|
| Standover height | 681 | 737 | 763 | 787 | 816 |
| Effective top tube | 26.8 | 29.0 | 30.0 | 31.0 | 32.1 |
| Reach | 537 | 554 | 568 | 583 | 597 |
| Head tube length | 21.1 | 21.8 | 22.4 | 23.0 | 23.5 |
| Handlebars | 619 | 646 | 673 | 702 | 729 |
| Stem | 24.4 | 25.4 | 26.5 | 27.6 | 28.7 |
| Width | 85 | 85 | 105 | 125 | 145 |
| Length | 560 | 560 | 560 | 560 | 560 |
| Degrees rise | 90 | 105 | 120 | 135 | 150 |
| Insertion | 5 | 5 | 10 | 10 | 10 |
| Seatpost | 130 | 130 | 150 | 150 | 150 |
| Fork | 170 | 175 | 175 | 175 | 175 |
| Trail | M | M | L | L | L |
| Head angle | 300 | 350 | 350 | 350 | 350 |
| Seat angle | 123 | 123 | 143 | 163 | 183 |
| Wheelbase | 38 | 38 | 38 | 38 | 38 |
| Chainstay length | 77 | 74 | 71 | 71 | 71 |
| Bottom bracket height | 70.5 | 71 | 71.5 | 71.5 | 71.5 |
| | 74 | 74 | 74 | 73.5 | 73.5 |
| | 1012 | 1025 | 1037 | 1048 | 1063 |
| | 39.8 | 40.4 | 40.8 | 41.3 | 41.9 |
| | 420 | 420 | 420 | 420 | 420 |
| | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 |
| | 288 | 291 | 295 | 295 | 295 |
| | 11.3 | 11.5 | 11.6 | 11.6 | 11.6 |

Aquila Notes

The Aquila's frameset is "fully featured", with head tube and seat tube inserts, medium diameter tubing, and True Temper double butted tubing. This means extra performance through lighter weight, increased frame rigidity for pedaling efficiency and steering control.

U.S. made Matrix rims are welded, then machined for smooth braking.

Upgrades from Mamba
 Full featured True Temper frame
 Alivio front derailleur

Sugino cranks with 20T inner ring
 Matrix Lobo rims Fisher Fishsticks bar ends

Hoo Koo E Koo

Our Price: \$ _____

General Specs

| | | | | |
|------------|---------------|-----------------------|---|---------------------|
| Frameset | Frame | True Temper | Triple-butted Cro-Moly | |
| | Fork | Rock Shox Quadra 21R | Micro-cellular elastomer suspension | |
| | Headset | Dia-Compe ST-2 | 25.4/34.0/30.0, 25.5 mm stack height | |
| Controls | Handlebars | Aluminum alloy | | |
| | Bar ends | Fisher Fishsticks | | |
| | Stem | Alloy | Ahead | |
| | Shifters | GripShift SRT-400 | | |
| | Brake levers | Dia-Compe PC-7N | w/reach adjusters | |
| | Grips | Kraton | | |
| Saddle | | Bontrager Plus 10 | | |
| | Seatpost | Alloy | Micro-adjust | |
| | Seat binder | Fisher Steel | 31.8 mm clamp w/ integral QR | |
| Brakes | | Shimano Alivio | | |
| Drivetrain | Crankset | Sugino Impel 300 | SS3 chainrings, 58/94 mm bolt hole circle | |
| | BB | Shimano BB-LP26 | 73/113 | |
| | Pedals | Resin | Steel cage, clips and straps | |
| | F. derailleur | Shimano Alivio | Top Swing, top pull, 31.8 mm / 1 ^{3/4} " | |
| | R. derailleur | Shimano STX SGS | Long cage | |
| | Cassette | Shimano STX | 7 speed | |
| | Chain | Shimano IG31 | | |
| Wheelset | Hub, rear | Shimano Alivio | Compact HyperGlide cassette, 135 mm O.L.D. | |
| | front | Fisher Ginzu Team | 12 mm suspension axle, 6 mm skewer | |
| | Rims | Matrix Lobo | Welded, machined, brushed | 20 32 42 |
| | Tires | Tioga Psycho-KS/TS | 26 x 1.95, racing tread, steel bead | 11 -- 76 100 |
| | Tubes | Presta | | |
| | Spokes | DT or Union Stainless | 32 front and rear | 13 40 65 85 |
| | Front | | 269 15ga. | 15 35 56 73 |
| Weight | | Rear- D/ND | 267/268 15ga. | 18 29 47 61 |
| Color | | 27.0 lbs. | 12.3 kg | 18 29 47 61 |
| | | Matte P.C. Green | | 21 25 40 52 |
| | | | | 24 22 35 46 |
| | | | | 28 19 30 -- |

Geometry and Fit

| Sizes | | 11.5 | 15.5 | 16.75 | 18 | 19.5 |
|-----------------------|----------------|------|------|-------|------|------|
| Standover height | 681 | 737 | 763 | 787 | 816 | |
| | | 26.8 | 29.0 | 30.0 | 31.0 | 32.1 |
| Effective top tube | 537 | 554 | 568 | 583 | 597 | |
| | | 21.1 | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | | 619 | 646 | 673 | 702 | 729 |
| | | 24.4 | 25.4 | 26.5 | 27.6 | 28.7 |
| Head tube length | | 85 | 85 | 105 | 125 | 145 |
| Handlebars | 25.4 mm | 560 | 560 | 560 | 560 | 560 |
| Stem, 41 mm clamp ht. | | 90 | 105 | 120 | 135 | 150 |
| | Width | 5 | 10 | 10 | 10 | 10 |
| | Length | 170 | 175 | 175 | 175 | 175 |
| Cranks | | M | M | L | L | L |
| | Length | 300 | 350 | 350 | 350 | 350 |
| Seatpost | 27.2mm | 158 | 158 | 178 | 198 | 218 |
| Fork | | 38 | 38 | 38 | 38 | 38 |
| | Steerer length | 77 | 74 | 71 | 71 | 71 |
| | Offset | 70.5 | 71 | 71.5 | 71.5 | 71.5 |
| Trail | | 74 | 74 | 74 | 73.5 | 73.5 |
| Head angle | | 1012 | 1025 | 1037 | 1048 | 1063 |
| Seat angle | | 39.8 | 40.4 | 40.8 | 41.3 | 41.9 |
| Wheelbase | | 420 | 420 | 420 | 420 | 420 |
| | | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 |
| Chainstay length | | 288 | 291 | 295 | 295 | 295 |
| | | 11.3 | 11.5 | 11.6 | 11.6 | 11.6 |
| Bottom bracket height | | | | | | |

Hoo Koo E Koo Notes

This is a suspended version of the Aquila. The Hoo Koo E Koo's Rock Shox Quadra 21R suspension fork uses the same micro-cellular elastomers as the Judy. Along with the suspension, we wanted to add more steering control, so the Hoo Koo gets an Aheadset for increased handlebar rigidity. And the Fisher Ginzu Team front hub uses a 12 mm Cro-Moly axle with a 6 mm skewer- about twice as stiff as a 10 mm axle set.

Upgrades from the Aquila

Rock Shox Quadra 21R
Fisher Ginzu Team front hub

Aheadset system headset and stem

Our Price: \$ _____

X-Caliber

General Specs

| | | | | |
|------------|---------------|-------------------------|---|---------------------|
| Frameset | Frame | True Temper OX-3 | Triple-butted Heat Treated Cro-Moly | |
| | Fork | Cro-Moly | Quad butted | |
| | Headset | Dia-Compe SA-2 | 25.4/34.0/30.0, 26.5 mm stack height | |
| Controls | Handlebars | Bontrager Race | Aluminum alloy | |
| | Bar ends | Fisher Fish Fins | Welded aluminum | |
| | Stem | Aluminum | Ahead | |
| | Shifters | GripShift SRT-800 X-Ray | | |
| | Brake levers | Dia-Compe PC-7N | w/reach adjusters | |
| | Grips | Kraton | | |
| Saddle | | Bontrager Plus 10 | Hollow Cro-Moly rails | |
| | Seatpost | Bontrager Comp | Aluminum alloy | |
| | Seat binder | Fisher Steel | 31.8 mm clamp w/integral bolt | |
| Brakes | | Shimano LX | | |
| Drivetrain | Crankset | Sugino Impel 700 | SS3 hard anodized chainrings, 58/94 mm bolt hole circle | |
| | BB | Shimano BB-UN52 | 73/113 | |
| | Pedals | Shimano M535 SPD | Clipless, w/float | |
| | F. derailleur | Shimano LX | Top Swing, top pull, 31.8 mm / 1 ^{3/4} " | |
| | R. derailleur | Shimano XT SGS | Long cage | |
| | Cassette | Shimano LX | 8 speed | |
| | Chain | Shimano IG70 | | |
| Wheelset | Hub, rear | Shimano LX | Compact HyperGlide cassette, 135 mm O.L.D. | |
| | front | Fisher Ginzu Team | 12 mm Cro-Moly suspension axle, 6 mm skewer | |
| | Rims | Bontrager BCX-1 | | 20 32 42 |
| | Tires | Tioga Psycho-K/T | 26 x 1.95, racing tread, Kevlar bead | 11 -- 76 100 |
| | Tubes | Presta | | |
| | Spokes | DT or Union Stainless | 32 front and rear | 11 -- 76 100 |
| | Front | | 270 15ga. | 12 44 70 92 |
| Weight | | Rear- D/ND | 268/269 15ga. | 14 37 60 79 |
| Color | | 24.1 lbs. | 10.9 kg | 14 37 60 79 |
| | | Matte Copper | | 16 33 52 69 |
| | | | | 18 29 47 61 |
| | | | | 21 25 40 52 |
| | | | | 24 22 35 46 |
| | | | | 28 19 30 -- |

Geometry and Fit

| Sizes | | 11.5 | 15.5 | 16.75 | 18 | 19.5 |
|-----------------------|----------------|------|------|-------|------|------|
| Standover height | 681 | 737 | 763 | 787 | 816 | |
| | | 26.8 | 29.0 | 30.0 | 31.0 | 32.1 |
| Effective top tube | 537 | 554 | 568 | 583 | 597 | |
| | | 21.1 | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | | 619 | 646 | 673 | 702 | 729 |
| | | 24.4 | 25.4 | 26.5 | 27.6 | 28.7 |
| Head tube length | | 85 | 85 | 105 | 125 | 145 |
| Handlebars | 25.4 mm | 560 | 560 | 560 | 560 | 560 |
| Stem, 41 mm clamp ht. | | 90 | 105 | 120 | 135 | 150 |
| | Width | 5 | 10 | 10 | 10 | 10 |
| | Length | 170 | 175 | 175 | 175 | 175 |
| Cranks | | M | M | L | L | L |
| | Length | 300 | 350 | 350 | 350 | 350 |
| Seatpost | 27.2mm | 170 | 170 | 190 | 210 | 230 |
| Fork | | 38 | 38 | 38 | 38 | 38 |
| | Steerer length | 77 | 74 | 71 | 71 | 71 |
| | Offset | 70.5 | 71 | 71.5 | 71.5 | 71.5 |
| Trail | | 74 | 74 | 74 | 73.5 | 73.5 |
| Head angle | | 1012 | 1025 | 1037 | 1048 | 1063 |
| Seat angle | | 39.8 | 40.4 | 40.8 | 41.3 | 41.9 |
| Wheelbase | | 420 | 420 | 420 | 420 | 420 |
| | | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 |
| Chainstay length | | 288 | 291 | 295 | 295 | 295 |
| | | 11.3 | 11.5 | 11.6 | 11.6 | 11.6 |
| Bottom bracket height | | | | | | |

X-Caliber Notes

The X-Caliber takes our full featured steel frameset to a new level. True Temper OX-3 tubing is heat treated for extra strength, and *triple* butted so less material is required. The result is a lighter, more lively ride. With this nice of a frame, it's only natural to use a quad butted fork.

To compliment this competition level frameset, we've spec'd 8 speeds, a lighter wheelset, and clipless pedals.

Upgrades from the Hoo Koo E Koo

True Temper OX-3 triple butted frame
Bontrager seatpost, handlebars with FishFins
Shimano M535 SPD clipless pedals

Quad butted fork
Psycho K Kevlar beaded tires
Hollow Cro-Moly saddle rails

8 speed with LX/XT
BCX-1 rims

X-Caliber RX

Our Price: \$ _____

General Specs

| | | | |
|------------|---------------|-------------------------|---|
| Frameset | Frame | True Temper OX-3 | Triple-butted heat Treated Cro-Moly |
| | Fork | Rock Shox Judy XC | MCU elastomers w/adjustable compression damping |
| | Headset | Dia-Compe SA-2 | 25.4/34.0/30.0, 26.5 mm stack height |
| Controls | Handlebars | Bontrager Race | Aluminum alloy |
| | Bar ends | Fisher Fish Fins | Welded aluminum |
| | Stem | Aluminum | Ahead |
| | Shifters | GripShift SRT-800 X-Ray | |
| | Brake levers | Dia-Compe PC-7N | w/reach adjusters |
| | Grips | Kraton | |
| Saddle | | Bontrager Plus 10 | Hollow Cro-Moly rails |
| | Seatpost | Bontrager Comp | Aluminum alloy |
| | Seat binder | Fisher Steel | 31.8 mm clamp w/integral bolt |
| Brakes | | Shimano LX | |
| Drivetrain | Crankset | Sugino Impel 700 | SS3 hard anodized chainrings, 58/94 mm bolt hole circle |
| | BB | Shimano BB-UN52 | 73/113 |
| | Pedals | Shimano M535 SPD | Clipless, w/float |
| | F. derailleur | Shimano LX | Top Swing, top pull, 31.8 mm / 1 1/4" |
| | R. derailleur | Shimano XT SGS | Long cage |
| | Cassette | Shimano LX | 8 speed |
| | Chain | Shimano IG70 | |
| Wheelset | Hub, rear | Shimano LX | Compact HyperGlide cassette, 135 mm O.L.D. |
| | front | Fisher Ginzu Team | 12 mm Cro-Moly suspension axle, 6 mm skewer |
| | Rims | Bontrager BCX-1 | |
| | Tires | Tioga Psycho-K/T | 26 x 1.95, racing tread, Kevlar bead |
| | Tubes | Presta | 11 -- 76 100 |
| | Spokes | DT or Union Stainless | 32 front and rear |
| | | Front | 12 44 70 92 |
| | | Rear: D/ND | 14 37 60 79 |
| Weight | | 25.2 lbs. | 16 33 52 69 |
| Color | | Matte Copper | 18 29 47 61 |
| | | | 21 25 40 52 |
| | | | 24 22 35 46 |
| | | | 28 19 30 -- |

Geometry and Fit

| Sizes | 11.5 | 15.5 | 16.75 | 18 | 19.5 |
|-----------------------|------|------|-------|------|------|
| Standover height | 681 | 737 | 763 | 787 | 816 |
| | 26.8 | 29.0 | 30.0 | 31.0 | 32.1 |
| Effective top tube | 537 | 554 | 568 | 583 | 597 |
| | 21.1 | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | 619 | 646 | 673 | 702 | 729 |
| | 24.4 | 25.4 | 26.5 | 27.6 | 28.7 |
| Head tube length | 85 | 85 | 105 | 125 | 145 |
| Handlebars 25.4mm | 560 | 560 | 560 | 560 | 560 |
| Stem, 41 mm clamp ht. | 90 | 105 | 120 | 135 | 150 |
| | 5 | 10 | 10 | 10 | 10 |
| Cranks | 170 | 175 | 175 | 175 | 175 |
| Seatpost 27.2mm | 300 | 350 | 350 | 350 | 350 |
| Fork | 160 | 160 | 180 | 200 | 220 |
| | 38 | 38 | 38 | 38 | 38 |
| Trail | 77 | 74 | 71 | 71 | 71 |
| Head angle | 70.5 | 71 | 71.5 | 71.5 | 71.5 |
| Seat angle | 74 | 74 | 74 | 73.5 | 73.5 |
| Wheelbase | 1012 | 1025 | 1037 | 1048 | 1063 |
| | 39.8 | 40.4 | 40.8 | 41.3 | 41.9 |
| Chainstay length | 420 | 420 | 420 | 420 | 420 |
| | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 |
| Bottom bracket height | 288 | 291 | 295 | 295 | 295 |
| | 11.3 | 11.5 | 11.6 | 11.6 | 11.6 |

X-Caliber RX Notes

This is the suspended version of the X-Caliber. With its Judy XC fork, the X-Caliber RX is a bike any NORBA pro would enjoy.

Upgrades from the X-Caliber

Rock Shox Judy XC

Lower Weight: Aluminum

One of the first questions we seem to always ask about a bike is "How much does it weigh?" The answer can sound a lot like a fishing story and although it's usually somewhere close to the truth, weight has become so important in bicycling that the truth is often stretched just to impress others or bolster egos.

Have you ever asked yourself why the weight of a bike is so important? It's easy to answer that it makes the bike ride better. Or you could make light of the question by saying that light bikes are easier to put on a roof rack. Most shop guys know the old joke "At our store, we don't carry that brand because none of us are strong enough".

So how did we get so worried about weight in the first place? Let's look back a few years. In the "olden days", light weight road bikes were made of steel using a lugged and brazed construction. Brazing allowed the use of thin walled tubing, while the welding technology of the time required much thicker tubes for adequate weld strength. Since butting, due to its cost, was restricted to expensive racing bikes, these inexpensive welded bikes were stuck with heavy straight gauge tube sets. A common weight for this type of bike was around 35-40 pounds. Boy have we come a long way!

While a 35 pound bike required more effort to pedal, the real problem was how they rode. The thicker tubing was very stiff, and had no resiliency to give life to the bike so they felt dead. This feel was not because of the weight itself, but because the frame was built with thick tubing which wouldn't absorb shock and couldn't transmit road feel.

So here's the key: Generally, better bikes use stronger materials in the frame. Since the materials are stronger, you need less of them, so the tubing can be made thinner overall. In addition, butting a tube removes material from the middle of the tube which further thins out the tubing walls without effecting the strength of the bike. As we thin out the tubing walls, we add liveliness to the frame for a better ride. And the weight comes down.

So there you have it, lighter bikes ride better. But rather than their lower weight, it's because their frames have a better feel. But there are other ways to effect the feel of a bike besides just changing the weight. The design and materials of the frame and even the quality of manufacturing can make a difference in how a bike rides.

Removing weight without removing performance.

Although we'd all agree that lighter is better, we'd also agree that this is only true if you don't give up any performance in the trade. Bikes that are whippy, or short in life span, are to be shunned regardless of how they tip the scales.

So how do you remove the most weight possible while maintaining performance? An easy answer not available to bike designers just a few years ago is the use of high tech materials like aluminum, titanium, or carbon fiber. Of these, aluminum has shown itself to be the most cost effective.

Aluminum

The use of aluminum, or more correctly aluminum alloys, has allowed reduction in bike weights while actually enhancing some performance characteristics of the bike. Aluminum alloys have a low density, or weight per unit volume, so you can use more material and still reduce the weight of a comparable steel bike by about a pound.

Another advantage of aluminum is that you can easily make larger or different tube shapes and incorporate more radical butting. This allows an aluminum bike to better address the particular stiffness and strength requirements of a bicycle frame.

The end result of using aluminum is a lightweight bike with excellent stiffness and strength characteristics. This can be done at a reasonable cost, because aluminum alloys are not much more expensive than Cro-Moly steel. A further benefit of aluminum is its inherent shock absorbing qualities; its modulus adds comfort to the ride as an extra bonus.

Gary's Aluminum Frame Details

Of course, not all aluminum bikes are the same. Gary has spec'd specific tube diameters and wall thicknesses to optimize the benefits of aluminum. By specing 6061, not only are Gary's bikes light and strong, but they also have high fatigue resistance. 6061 exhibits a much better elongation, or ductility, than 7005 aluminum for a longer life.

Fisher aluminum bikes use a special seat cluster design with a welded insert in the top of the seat tube. This inset allows more beef for all the welds at the seat cluster, while resisting deformation from the heat. It also reinforces this area, and allows the use of a 27.2 seat post with a large diameter, thin-walled seat tube. Other details easily seen on Fisher bikes are the replaceable derailleur hanger, the Anti Chain Suck Device, and the large reinforcing gusset under the down tube which greatly adds the fatigue resistance of Fisher aluminum bikes. The head tube is externally reinforced to provide more support for the headset.

New Features for '96

The biggest change for this year is the use of short-butted tubes on the Paragon, Mt. Tam, and Supercaliber. With this new radical tube set, Gary has pared the frame weight down from the respectably light 3.9 pounds of the Kaitai to an incredible 3.2 pounds for the top end aluminum models.

Kaitai

General Specs

| | | | | | | | |
|------------|---------------|-----------------------|--|-----------|-----------|-----------|------------|
| Frameset | Frame | 6061 T6 aluminum | TIG welded | | | | |
| | Fork | Cro-Moly | | | | | |
| | Headset | Tange Seiki Passage | 25.4/34.0/30.0, 33.4 mm stack height | | | | |
| Controls | Handlebars | Aluminum alloy | | | | | |
| | Bar ends | Fisher Fishsticks | | | | | |
| | Stem | Cro-Moly | Alloy wedge | | | | |
| | Shifters | GripShift SRT-400 | | | | | |
| | Brake levers | Dia-Compe PC-7N | W/reach adjusters | | | | |
| | Grips | Kraton | | | | | |
| Saddle | | Bontrager Plus 10 | | | | | |
| | Seatpost | Alloy | Micro-adjust | | | | |
| | Seat binder | Fisher Aluminum | 35 mm clamp w/QR | | | | |
| Brakes | | Shimano Alivio | | | | | |
| Drivetrain | Crankset | Sugino Impel 350 | SS3 chainrings, 58/94 mm bolt hole circle | | | | |
| | BB | Shimano BB-LP26 | 73/113 | | | | |
| | Pedals | Resin | Steel cage, clips and straps | | | | |
| | F. derailleur | Shimano Alivio | Top Swing, top pull, 34.9 mm / 1 ³ / ₈ " | | | | |
| | R. derailleur | Shimano STX SGS | Long cage | | | | |
| | Cassette | Shimano STX | 7 speed | | | | |
| | Chain | Shimano IG31 | | | | | |
| Wheelset | Hub, rear | Shimano Alivio | Compact HyperGlide cassette, 135 mm O.L.D. | | | | |
| | front | Alloy | Oversize axle | 20 | 32 | 42 | |
| | Rims | Matrix Lobo | Welded, machined, brushed | | | | |
| | Tires | Tioga Psycho-KS/TS | 26 x 1.95, racing tread, steel bead | 11 | -- | 76 | 100 |
| | Tubes | Presta | | 13 | 40 | 65 | 85 |
| | Spokes | DT or Union Stainless | 32 front and rear | 15 | 35 | 56 | 73 |
| | | Front | 269 15ga. | 18 | 29 | 47 | 61 |
| | | Rear- D/ND | 267/268 15ga. | 21 | 25 | 40 | 52 |
| Weight | | 26.0 lbs. | 11.8 kg | 24 | 22 | 35 | 46 |
| Color | | Slate | | 28 | 19 | 30 | -- |

Geometry and Fit

| Sizes | 14 | 16 | 17.5 | 19.5 |
|-----------------------|---------|----------------|------|------|
| Standover height | 721 | 759 | 785 | 821 |
| | 28.4 | 29.9 | 30.9 | 32.3 |
| Effective top tube | 554 | 568 | 583 | 597 |
| | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | 646 | 673 | 702 | 729 |
| | 25.4 | 26.5 | 27.6 | 28.7 |
| Head tube length | 90 | 105 | 125 | 145 |
| Handlebars | 25.4 mm | Width | 560 | 560 |
| Stem | 25.4 mm | Length | 105 | 120 |
| | | Degrees rise | 5 | 5 |
| | | Insertion | 130 | 130 |
| Seatpost | 27.2 mm | Length | 300 | 350 |
| Cranks | | Length | 170 | 175 |
| | | Toe Clip size | M | M |
| Forks | | Steerer length | 128 | 143 |
| | | Offset | 38 | 38 |
| Trail | | | 74 | 74 |
| Head angle | | | 71 | 71.5 |
| Seat angle | | | 74 | 74 |
| Wheelbase | | | 1028 | 1040 |
| | | | 40.5 | 40.9 |
| Chainstay length | | | 420 | 420 |
| | | | 16.5 | 16.5 |
| Bottom bracket height | | | 290 | 295 |
| | | | 11.4 | 11.6 |

Kaitai Notes

This is the same frame as the Montare, but with a more affordable parts selection. In other words, its a really hot bike. Frame weight is only 3.9 pounds, its got Gary's geometry, and the spec is right on. To show its a serious bike, we even put on bar ends.

Upgrades from the Aquila

6061 T6 Aluminum frame
Sugino Impel 350 cranks and 20T chainring

Our Price: \$ _____

Big Sur

Our Price: \$ _____

General Specs

| | | | | | | | |
|------------|---------------|-----------------------|--|-----------|-----------|-----------|------------|
| Frameset | Frame | 6061 T6 aluminum | TIG welded | | | | |
| | Fork | Rock Shox Quadra 5 | Elastomer suspension | | | | |
| | Headset | Tange Seiki ST-2 | 25.4/34.0/30.0, 25.5 mm stack height | | | | |
| Controls | Handlebars | Aluminum alloy | | | | | |
| | Bar ends | Fisher Fishsticks | | | | | |
| | Stem | Alloy | Ahead | | | | |
| | Shifters | GripShift SRT-400 | | | | | |
| | Brake levers | Dia-Compe PC-7N | W/reach adjusters | | | | |
| | Grips | Kraton | | | | | |
| Saddle | | Bontrager Plus 10 | | | | | |
| | Seatpost | Alloy | Micro-adjust | | | | |
| | Seat binder | Fisher Aluminum | 35 mm clamp w/QR | | | | |
| Brakes | | Shimano Alivio | | | | | |
| Drivetrain | Crankset | Sugino Impel 350 | SS3 chainrings, 58/94 mm bolt hole circle | | | | |
| | BB | Shimano BB-LP26 | 73/113 | | | | |
| | Pedals | Resin | Steel cage, clips and straps | | | | |
| | F. derailleur | Shimano Alivio | Top Swing, top pull, 34.9 mm / 1 ³ / ₈ " | | | | |
| | R. derailleur | Shimano STX SGS | Long cage | | | | |
| | Cassette | Shimano STX | 7 speed | | | | |
| | Chain | Shimano IG31 | | | | | |
| Wheelset | Hub, rear | Shimano Alivio | Compact HyperGlide cassette, 135 mm O.L.D. | | | | |
| | front | Fisher Ginzu Team | 12 mm Cro-Moly axle, 6 mm skewer | | | | |
| | Rims | Matrix Lobo | Welded, machined, brushed | 11 | -- | 76 | 100 |
| | Tires | Tioga Psycho-KS/TS | 26 x 1.95, racing tread, steel bead | 13 | 40 | 65 | 85 |
| | Tubes | Presta | | 15 | 35 | 56 | 73 |
| | Spokes | DT or Union Stainless | 32 front and rear | 18 | 29 | 47 | 61 |
| | | Front | 269 15ga. | 21 | 25 | 40 | 52 |
| | | Rear- D/ND | 267/268 15ga. | 24 | 22 | 35 | 46 |
| Weight | | 26.4 lbs. | 12.0 kg | 28 | 19 | 30 | -- |
| Color | | Gloss Onyx Black | | | | | |

Geometry and Fit

| Sizes | 14 | 16 | 17.5 | 19.5 |
|-----------------------|---------|----------------|------|------|
| Standover height | 721 | 759 | 785 | 821 |
| | 28.4 | 29.9 | 30.9 | 32.3 |
| Effective top tube | 554 | 568 | 583 | 597 |
| | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | 646 | 673 | 702 | 729 |
| | 25.4 | 26.5 | 27.6 | 28.7 |
| Head tube length | 90 | 105 | 125 | 145 |
| Handlebars | 25.4 mm | Width | 560 | 560 |
| Stem, 41 mm clamp ht. | | Length | 105 | 120 |
| | | Degrees rise | 10 | 10 |
| | | Insertion | 130 | 130 |
| Seatpost | 27.2 mm | Length | 300 | 350 |
| Cranks | | Length | 170 | 175 |
| | | Toe Clip size | M | M |
| Forks | | Steerer length | 163 | 178 |
| | | Offset | 38 | 38 |
| Trail | | | 74 | 74 |
| Head angle | | | 71 | 71.5 |
| Seat angle | | | 74 | 74 |
| Wheelbase | | | 1028 | 1040 |
| | | | 40.5 | 40.9 |
| Chainstay length | | | 420 | 420 |
| | | | 16.5 | 16.5 |
| Bottom bracket height | | | 290 | 295 |
| | | | 11.4 | 11.6 |

Big Sur Notes

The Big Sur is a suspended version of the Kaitai, so we added a Fisher Ginzu Team suspension hub and skewer which is about twice as stiff as a 10 mm Cro-Moly axle. We also spec'd the Aheadset system to get the most steering rigidity possible with the fork.

Upgrades from the Kaitai

Rock Shox Quadra 5 suspension fork
Aheadset and Ahead stem
Fisher Ginzu Team suspension hub w/ 12 mm Cro-Moly axle and 6 mm skewer

Montare

General Specs

| | | | | | |
|----------|------------------|-------------------------|--|---------------------|--|
| Frameset | Frame | 6061 T6 aluminum | | | |
| | Fork | Rock Shox Quadra 21R | Micro-cellular elastomer suspension | | |
| | Headset | Dia-Compe SA-2 | 25.4/34.0/30.0, 26.5 mm stack height | | |
| Controls | Handlebars | Aluminum alloy | | | |
| | Bar ends | Fisher Fishsticks | | | |
| | Stem | Aluminum | Ahead | | |
| | Shifters | GripShift SRT-600 | | | |
| | Brake levers | Dia-Compe PC-7N | w/reach adjusters | | |
| Saddle | Grips | Kraton | | | |
| | Seatpost | Bontrager Plus 10 Alloy | Micro-adjust | | |
| Brakes | Seat binder | Fisher Aluminum | 35 mm clamp w/QR | | |
| | Drivetrain | Shimano STX-RC | | | |
| Crankset | BB | Sugino Impel 500 | SS3 chainrings, 58/94 mm bolt hole circle | | |
| | BB | Shimano BB-LP26 | 73/113 | | |
| | Pedals | Alloy | Clips and straps | | |
| | F. derailleur | Shimano STX | Top Swing, top pull, 34.9 mm / 1 ^{3/8"} | | |
| | R. derailleur | Shimano LX SGS | Long cage | | |
| Wheelset | Cassette | Shimano LX | 8 speed | | |
| | Chain | Shimano IG51 | | | |
| | Hub, rear | Shimano LX | Compact HyperGlide cassette, 135 mm O.L.D. | | |
| | front | Fisher Ginzu Team | 12 mm suspension axle w/ 6 mm skewer | | |
| | Rims | Matrix Lobo | Welded, machined, brushed | | |
| | Tires | Tioga Psycho-KS/Ts | 26 x 1.95, racing tread, steel bead | 20 32 42 | |
| | Spokes | Presta | | 11 -- 76 100 | |
| Weight | Front | DT or Union Stainless | 32 front and rear | 12 44 70 92 | |
| | Rear | D/ND | 269 15ga. | 14 37 60 79 | |
| | Color | 25.9 lbs. | 11.8 kg | 16 33 52 69 | |
| Color | Blasted Aluminum | | | 18 29 47 61 | |
| | | | | 21 25 40 52 | |
| | | | | 24 22 35 46 | |
| | | | | 28 19 30 -- | |
| | | | | | |

Geometry and Fit

| | | | | | |
|-----------------------|----------------|------|------|------|------|
| Sizes | | 14 | 16 | 17.5 | 19.5 |
| Standover height | | 721 | 759 | 785 | 821 |
| | | 28.4 | 29.9 | 30.9 | 32.3 |
| Effective top tube | | 554 | 568 | 583 | 597 |
| | | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | | 646 | 673 | 702 | 729 |
| | | 25.4 | 26.5 | 27.6 | 28.7 |
| Head tube length | | 90 | 105 | 125 | 145 |
| Handlebars | 25.4mm | 560 | 560 | 560 | 560 |
| Stem, 41 mm clamp ht. | | 105 | 120 | 135 | 150 |
| | Width | 10 | 10 | 10 | 10 |
| | Length | 10 | 10 | 10 | 10 |
| | Degrees rise | 300 | 350 | 350 | 350 |
| Seatpost | 27.2mm | 170 | 175 | 175 | 175 |
| Cranks | | M | M | L | L |
| | Length | 164 | 179 | 199 | 219 |
| Forks | | 38 | 38 | 38 | 38 |
| | Toe Clip size | 74 | 74 | 74 | 74 |
| | Steerer length | 71 | 71.5 | 71.5 | 71.5 |
| | Offset | 74 | 74 | 73.5 | 73.5 |
| Trail | | 1028 | 1040 | 1051 | 1065 |
| Head angle | | 40.5 | 40.9 | 41.4 | 41.9 |
| Seat angle | | 420 | 420 | 420 | 420 |
| Wheelbase | | 16.5 | 16.5 | 16.5 | 16.5 |
| | | 290 | 295 | 295 | 295 |
| Chainstay length | | 11.4 | 11.6 | 11.6 | 11.6 |
| Bottom bracket height | | | | | |

Montare Notes

This is our lowest priced aluminum frame with 8 speed cassette and suspension fork. These features qualify the Montare as a budget NORBA racer.

Upgrades from the Kaitai

- Rock Shox Quadra 21R suspension fork
- 8 speed, w/ GripShift SRT-600 with Shimano LX rear derailleur and hub
- Alloy pedals
- Shimano STX-RC brakes
- Sugino Impel 500 cranks with 2 alloy rings

Our Price: \$ _____

Paragon

General Specs

| | | | | | |
|----------|----------------|-----------------------|--|---------------------|--|
| Frameset | Frame | Easton | Short butted 6061 T6 aluminum | | |
| | Fork | Manitou Mach 5 Pro | MCU elastomer suspension | | |
| | Headset | Dia-Compe SA-2 | 25.4/34.0/30.0, 26.5 mm stack height | | |
| Controls | Handlebars | Bontrager Race | Aluminum | | |
| | Bar ends | Fisher FishFins | Welded aluminum | | |
| | Stem | Alloy | Ahead | | |
| | Shifters | GripShift SRT-800 | X-Ray | | |
| | Brake levers | Dia-Compe PC-7N | W/reach adjusters | | |
| Saddle | Grips | Kraton | | | |
| | Seatpost | Bontrager Plus 10 | Hollow Cro-Moly rails | | |
| Brakes | Seat binder | Bontrager Comp | Aluminum | | |
| | Drivetrain | Fisher Aluminum | 35 mm clamp w/integral bolt | | |
| Crankset | BB | Shimano LX | | | |
| | BB | Sugino Impel 700 | SS3 hard anodized rings, 58/94 mm bolt hole circle | | |
| | Pedals | Shimano BB-UN52 | 73/113 | | |
| | F. derailleur | Shimano M535 SPD | Clipless, w/float | | |
| | R. derailleur | Shimano LX | Top Swing, top pull, 34.9 mm / 1 ^{3/8"} | | |
| Wheelset | Cassette | Shimano XT SGS | Long cage | | |
| | Chain | Shimano LX | 8 speed | | |
| | Hub, rear | Shimano IG70 | Compact HyperGlide cassette, 135 mm O.L.D. | | |
| | front | Shimano LX | 12 mm Cro-Moly suspension axle, 6 mm skewer | | |
| | Rims | Fisher Ginzu Team | | | |
| | Tires | Bontrager BCX-1 | 26 x 1.95, racing tread, Kevlar bead | 20 32 42 | |
| | Spokes | Tioga Psycho-K/T | | 11 -- 76 100 | |
| Weight | Front | DT or Union Stainless | 32 front and rear | 12 44 70 92 | |
| | Rear | D/ND | 270 15ga. | 14 37 60 79 | |
| | Color | 25.0 lbs. | 11.3 kg | 16 33 52 69 | |
| Color | Ballistic Blue | | | 18 29 47 61 | |
| | | | | 21 25 40 52 | |
| | | | | 24 22 35 46 | |
| | | | | 28 19 30 -- | |
| | | | | | |

Geometry and Fit

| | | | | | |
|-----------------------|----------------|------|------|------|------|
| Sizes | | 14 | 16 | 17.5 | 19.5 |
| Standover height | | 721 | 759 | 785 | 821 |
| | | 28.4 | 29.9 | 30.9 | 32.3 |
| Effective top tube | | 554 | 568 | 583 | 597 |
| | | 21.8 | 22.4 | 23.0 | 23.5 |
| Reach | | 646 | 673 | 702 | 729 |
| | | 25.4 | 26.5 | 27.6 | 28.7 |
| Head tube length | | 90 | 105 | 125 | 145 |
| Handlebars | 25.4mm | 560 | 560 | 560 | 560 |
| Stem, 41 mm clamp ht. | | 105 | 120 | 135 | 150 |
| | Width | 10 | 10 | 10 | 10 |
| | Length | 10 | 10 | 10 | 10 |
| | Degrees rise | 300 | 350 | 350 | 350 |
| Seatpost | 27.2mm | 170 | 175 | 175 | 175 |
| Cranks | | M | M | L | L |
| Forks | | 164 | 179 | 199 | 219 |
| | Length | 38 | 38 | 38 | 38 |
| | Steerer length | 74 | 74 | 74 | 74 |
| | Offset | 71 | 71.5 | 71.5 | 71.5 |
| Trail | | 74 | 74 | 73.5 | 73.5 |
| Head angle | | 1028 | 1040 | 1051 | 1065 |
| Seat angle | | 40.5 | 40.9 | 41.4 | 41.9 |
| Wheelbase | | 420 | 420 | 420 | 420 |
| Chainstay length | | 16.5 | 16.5 | 16.5 | 16.5 |
| Bottom bracket height | | 290 | 295 | 295 | 295 |
| | | 11.4 | 11.6 | 11.6 | 11.6 |

Paragon Notes

Not just a "Budget Racer", the Paragon could set the standard for a NORBA race bike, but its better than a standard value. Fully race ready, this is a radically butted 6061 T6 frame resulting in a weight of just 3.2 pounds. A host of high performance parts including Bontrager bars and seatpost, Shimano M535 SPD clipless pedals, and the Manitou Mach 5 fork make this bike ready to race right out of the box.

Upgrades from the Montare

- Easton short butted frame
- Sugino Impel 700 cranks
- Shimano LX/XT derailleurs
- Bontrager bars and seatpost
- Manitou Mach 5 Pro suspension fork
- BB-UN52 bottom bracket
- Shimano M535 SPD clipless pedals
- Psycho K/T tires w/Kevlar beads
- GripShift SRT-800 X-Ray
- Shimano IG70 chain
- Bontrager BCX-1 rims
- Hollow Cro-Moly saddle rails

Mt. Tam

General Specs

| | | | | | |
|------------|---------------|-------------------------------------|--|-----------|---------------------|
| Frameset | Frame | Easton | Short butted 6061 T6 aluminum | | |
| | Fork | Rock Shox Judy XC | MCU elastomers with adjustable compression damping | | |
| | Headset | Dia-Compe SA-2 | 25.4/34.0/30.0, 26.5 mm stack height | | |
| Controls | Handlebars | Bontrager Race | Aluminum | | |
| | Bar ends | Fisher FishFins | Welded aluminum | | |
| | Stem | Alloy | Ahead | | |
| | Shifters | Shimano LX | | | |
| | Brake levers | Shimano LX | W/reach adjusters | | |
| | Grips | Fisher Hex | High density foam | | |
| Saddle | Seatpost | Bontrager | Hollow Cro-Moly rails, leather cover | | |
| | Seat binder | Fisher Aluminum | Aluminum | | |
| Brakes | | Shimano LX | 35 mm clamp w/integral bolt | | |
| Drivetrain | Crankset | Shimano LX | 58/94 mm bolt hole circle | | |
| | BB | Shimano BB-UN52 | 73/113 | | |
| | Pedals | Shimano M535 SPD | Clipless, w/float | | |
| | F. derailleur | Shimano LX | Top Swing, top pull, 34.9 mm / 1 ^{3/8} " | | |
| | R. derailleur | Shimano XT SGS | Long cage | | |
| | Cassette | Shimano LX | 8 speed | | |
| | Chain | Shimano IG70 | | | |
| Wheelset | Hub, rear | Shimano LX | Compact HyperGlide cassette, 135 mm O.L.D. | | |
| | front | Fisher Ginzu Pro | 17 mm alloy suspension axle, 6 mm skewer | | |
| | Rims | Bontrager BCX Blue/Red or Mavic 221 | | | |
| | Tires | Tioga Psycho-K/T | 26 x 1.95, racing tread, Kevlar bead | | |
| | Tubes | Presta | | | |
| | Spokes | DT or Union Stainless | 32 front and rear | 22 | 32 42 |
| Weight | | Front | 270 15ga. | 11 | -- 76 100 |
| Color | | Rear- D/ND | 268/269 15ga. | 12 | 48 70 92 |
| | | 24.6 lbs. | 11.2 kg | 14 | 41 60 79 |
| | | Polished | | 16 | 36 52 69 |
| | | | | 18 | 32 47 61 |
| | | | | 21 | 27 40 52 |
| | | | | 24 | 24 35 46 |
| | | | | 28 | 21 30 -- |

Geometry and Fit

| | | | | | | |
|-----------------------|----------------|------|------|------|------|--|
| Sizes | | 14 | 16 | 17.5 | 19.5 | |
| Standover height | | 721 | 759 | 785 | 821 | |
| | | 28.4 | 29.9 | 30.9 | 32.3 | |
| Effective top tube | | 554 | 568 | 583 | 597 | |
| | | 21.8 | 22.4 | 23.0 | 23.5 | |
| Reach | | 646 | 673 | 702 | 729 | |
| | | 25.4 | 26.5 | 27.6 | 28.7 | |
| Head tube length | | 90 | 105 | 125 | 145 | |
| Handlebars | 25.4mm | 560 | 560 | 560 | 560 | |
| Stem, 41 mm clamp ht. | | 105 | 120 | 135 | 150 | |
| | Width | 10 | 10 | 10 | 10 | |
| | Length | 10 | 10 | 10 | 10 | |
| | Degrees rise | 10 | 10 | 10 | 10 | |
| Seatpost | 27.2mm | 300 | 350 | 350 | 350 | |
| Cranks | | 170 | 175 | 175 | 175 | |
| Forks | | 164 | 176 | 196 | 219 | |
| | Steerer length | 38 | 38 | 38 | 38 | |
| | Offset | 38 | 38 | 38 | 38 | |
| Trail | | 74 | 74 | 74 | 74 | |
| Head angle | | 71 | 71.5 | 71.5 | 71.5 | |
| Seat angle | | 74 | 74 | 73.5 | 73.5 | |
| Wheelbase | | 1028 | 1040 | 1051 | 1065 | |
| | | 40.5 | 40.9 | 41.4 | 41.9 | |
| Chainstay length | | 420 | 420 | 420 | 420 | |
| | | 16.5 | 16.5 | 16.5 | 16.5 | |
| Bottom bracket height | | 290 | 295 | 295 | 295 | |
| | | 11.4 | 11.6 | 11.6 | 11.6 | |

Mt. Tam Notes

The Mt. Tam shares the high end Gary Fisher aluminum short butted frame, but with a distinctive polished aluminum look. With a Rock Shox Judy XC suspension fork and the new Shimano RapidFire SL shifters, the Mt. Tam rides as well as it looks. In fact, all that shiny aluminum looks so good we thought we'd better dress up the parts, so we added Bontrager's Red/Blue rim combination and a Fisher Ginzu Pro front hub. And a such luxury deserves a fine leather saddle cover.

Upgrades from the Paragon

| | |
|--------------------------------------|---------------------------------------|
| Rock Shox Judy XC suspension fork | Hi-Density foam grips |
| Shimano LX shifters and cranks | Fisher Ginzu Pro front suspension hub |
| Leather saddle cover | Polished frame |
| Bontrager Red/Blue rims or Mavic 221 | |

Our Price: \$ _____

General Specs

| | | | | | |
|------------|---------------|-------------------------------------|---|-----------|---------------------|
| Frameset | Frame | Easton | Short butted 6061 T6 aluminum | | |
| | Fork | Manitou Mach 5 SX | MCU elastomers with adjustable rebound damping | | |
| | Headset | Tange Seiki DL-2 | 25.4/34.0/30.0, 25.8 mm stack height | | |
| Controls | Handlebars | Bontrager Ti | | | |
| | Bar ends | Fisher FishFins | | | |
| | Stem | Alloy | Ahead | | |
| | Shifters | Shimano XT | | | |
| | Brake levers | Shimano XT | W/reach adjusters | | |
| | Grips | Fisher Hex | High density foam | | |
| Saddle | Seatpost | Bontrager Ti | Leather cover | | |
| | Seat binder | Bontrager Race Lite | Aluminum | | |
| Brakes | | Fisher Aluminum | 35 mm clamp w/integral bolt | | |
| Drivetrain | Crankset | Shimano XT V Brakes | | | |
| | BB | Shimano XT | 58/94 mm bolt hole circle | | |
| | Pedals | Shimano BB-UN72 | 73/113 | | |
| | F. derailleur | Shimano M535 SPD | Clipless, w/float | | |
| | R. derailleur | Shimano XT | Top Swing, top pull, 34.9 mm / 1 ^{3/8} " | | |
| | Cassette | Shimano XT SGS | Long cage | | |
| | Chain | Shimano LX | 8 speed | | |
| | Chain | Shimano IG90 | | | |
| Wheelset | Hub, rear | Shimano XT | Compact HyperGlide cassette, 135 mm O.L.D. | | |
| | front | Fisher Ginzu Pro | 17 mm alloy suspension axle, 6 mm skewer | | |
| | Rims | Bontrager BCX Blue/Red or Mavic 221 | | | |
| | Tires | Tioga Psycho-K/T | 26 x 1.95, racing tread, Kevlar bead | | |
| | Tubes | Presta | Superlite | | |
| | Spokes | DT or Wheelsmith Stainless | Double butted, alloy nipples, 32 front and rear | | |
| Weight | | Front | 270 15/16ga. | 22 | 32 42 |
| Color | | Rear- D/ND | 268/269 15/16ga. | 11 | -- 76 100 |
| | | 23.8 lbs. | 10.8 kg | 12 | 48 70 92 |
| | | Matte Red | | 14 | 41 60 79 |
| | | | | 16 | 36 52 69 |
| | | | | 18 | 32 47 61 |
| | | | | 21 | 27 40 52 |
| | | | | 24 | 24 35 46 |
| | | | | 28 | 21 30 -- |

Geometry and Fit

| | | | | | | |
|-----------------------|----------------|------|------|------|------|--|
| Sizes | | 14 | 16 | 17.5 | 19.5 | |
| Standover height | | 721 | 759 | 785 | 821 | |
| | | 28.4 | 29.9 | 30.9 | 32.3 | |
| Effective top tube | | 554 | 568 | 583 | 597 | |
| | | 21.8 | 22.4 | 23.0 | 23.5 | |
| Reach | | 646 | 673 | 702 | 729 | |
| | | 25.4 | 26.5 | 27.6 | 28.7 | |
| Head tube length | | 90 | 105 | 125 | 145 | |
| Handlebars | 25.4mm | 560 | 560 | 560 | 560 | |
| Stem, 41 mm clamp ht. | | 105 | 120 | 135 | 150 | |
| | Width | 10 | 10 | 10 | 10 | |
| | Length | 10 | 10 | 10 | 10 | |
| | Degrees rise | 10 | 10 | 10 | 10 | |
| Seatpost | 27.2mm | 300 | 350 | 350 | 350 | |
| Cranks | | 170 | 175 | 175 | 175 | |
| Forks | | 161 | 176 | 196 | 216 | |
| | Steerer length | 38 | 38 | 38 | 38 | |
| | Offset | 38 | 38 | 38 | 38 | |
| Trail | | 74 | 74 | 74 | 74 | |
| Head angle | | 71 | 71.5 | 71.5 | 71.5 | |
| Seat angle | | 74 | 74 | 73.5 | 73.5 | |
| Wheelbase | | 1028 | 1040 | 1051 | 1065 | |
| | | 40.5 | 40.9 | 41.4 | 41.9 | |
| Chainstay length | | 420 | 420 | 420 | 420 | |
| | | 16.5 | 16.5 | 16.5 | 16.5 | |
| Bottom bracket height | | 290 | 295 | 295 | 295 | |
| | | 11.4 | 11.6 | 11.6 | 11.6 | |

Supercaliber Notes

The Supercaliber is our top of the line aluminum model. So when we spec'd it, we let out the stops. It has so many cool features, your customer will be hard pressed to make it any cooler.

Upgrades from the Mt. Tam

| | |
|--|---|
| Mach 5 SX suspension fork | Shimano XT V Brakes |
| Tange Seiki DL-2 Aheadset | Bontrager Ti handlebars and saddle |
| DT or Wheelsmith 15/16 butted spokes w/alloy nipples | XT shifters, rear hub, and front derailleur |
| XT cranks, BB-UN72 bottom bracket, and IG90 chain | |

Space Age Bikes: OCLV

Gary Fisher and Greg LeMond OCLV bikes are built in the U.S. by a manufacturer with a proven track record, starting in 1986, of manufacturing carbon fiber bicycles. A lot of R&D goes to make sure that Gary Fisher and Greg LeMond bikes get the best carbon composite possible.

Composite means you have two or more visibly different components made into a single material with the best attributes of both components. In this case, the two components are the carbon fibers and a matrix of epoxy holding the fibers in place.

A carbon fiber is a long strand of carbon molecules which looks something like a black hair. There are a lot of ways you can get the carbon molecules to join together with different results, like higher modulus, or stiffness. There are also different kinds of carbon fibers, and different materials used to bind the fibers into a composite.

With the material used for OCLV bikes, the matrix is mostly a thermoset epoxy, with a toughener mixed in. This blend has the lowest weight, and highest strength and stiffness available. Other composites used in bikes today include fiberglass/carbon fiber mix in thermoset, or carbon fiber with thermoplastic matrix. The biggest difference in all these different composite materials and their uses is how the carbon fibers are oriented, and how close together they are. This has a lot to do with the end results of stiffness, strength, and weight, and that's what sets OCLV out in front of the pack.

Optimum Compaction means that the carbon fibers are compressed just the right amount in the epoxy for the best strength possible. If you have too much or too little epoxy, you don't get full strength out of the composite. Low Void is an engineering term meaning that less than 2% of the composite is voids. Voids are any inconsistencies in the composite, like air bubbles or epoxy pockets. Again, Any voids would mean lowered strength. The process used in OCLV bikes commonly gets in under 1%, which is better than aircraft specifications.

The OCLV process benefits the bike structure in several ways. If you maximize the strength and stiffness of a material, you can use less of it, and produce a lighter structure with the strength and stiffness you need. The real key to these incredible bikes is the control over the fibers in the matrix resulting from the OCLV process.

With a round, cylindrical tube, its fairly easy to control the fiber orientation and compaction. The fibers can be placed on a mandrel, or steel cylinder, and then pressed tightly in place from the outside. After curing, you can pull the mandrel out from the tube. But you can't do that with a complex shape like a lug. That's the secret of the OCLV process; it allows us to place the fibers right where they are supposed to be in a lug with a complex shape.

Some people criticize the use of lugs with carbon fiber saying bikes with lugs are weak. If the lug and tube only touched at their ends, that would be true. But OCLV bikes have highly-engineered lugs and tubes with a precision tapered overlapping design with a very large bond area, plus the lugs are designed so that the stress is spread over a large area, and away from the highest stress areas found near the tubing joints of a bike.

As for the criticism that the glue in the bond is inherently weak, you have to remember that in carbon fiber composite, the material ITSELF is glued together. As long as the bond is of the same precision as the parts you are bonding, there is no weak point.

That explains why OCLV frames are the lightest around, yet fully capable of hard core racing. Gary's OCLV mountain frames weigh a mere 2.92 pounds, while Greg's road frames tip the scales at a feathery 2.50 pounds.

Always Improving

Every year, we tweak and tune. In 1995, we answered your requests to use internal threaded water bottle mounts, while satisfying our need for complete structural integrity of the frame. Along with that, we changed to top tube routed cables to avoid mud buildup and cable friction. We also tuned the tube set a bit. We've added a bit more bottom bracket rigidity through the use of filament wound tubing which has more torsional strength.

For 1996 we have slightly redesigned the bottom bracket lugs making them more durable while adding some mud clearance on the mountain bikes.

Also for '96, we have introduced a new smaller 13.5" size of mountain bike to fit smaller people. And to make the size range work better, we shortened the top tube of the 14.75" size slightly.

Our Price: \$ _____

General Specs

| | | | | |
|------------|---------------|---------------------------|--|---------------------|
| Frameset | Frame | OCLV | Carbon composite | |
| | Fork | Rock Shox Judy XC | MCU elastomer w/adjustable compression damping | |
| | Headset | Tange Seiki DL-2 | 25.4/34.0/30.0, 25.8 mm stack height | |
| Controls | Handlebars | Bontrager Ti | Butted | |
| | Bar ends | Fisher FishFins | | |
| | Stem | Alloy | Ahead | |
| | Shifters | Shimano XT | | |
| | Brake levers | Shimano XT | | |
| Saddle | Grips | Fisher Hex | High density foam | |
| | Seatpost | Bontrager | Hollow Cro-Moly rails, leather cover | |
| | Seat binder | Bontrager Race Lite | Aluminum | |
| Brakes | | Fisher OCLV | 35 mm clamp w/ integral bolt | |
| Drivetrain | | Shimano XT V Brakes | | |
| | Crankset | Shimano LX | 58/94 mm bolt hole circle | |
| | BB | Shimano BB-UN52 | 73/113 | |
| | Pedals | Shimano M535 SPD | Clipless, w/float | |
| | F. derailleur | Shimano LX | Top pull, 34.9 mm / 1 ^{3/8} " | |
| | R. derailleur | Shimano XT SGS | Long cage | |
| | Cassette | Shimano LX | 8 speed | |
| | Chain | Shimano IG70 | | |
| Wheelset | Hub, rear | Shimano LX | Compact HyperGlide cassette, 135 mm O.L.D. | |
| | front | Fisher Ginzu Pro | 17 mm aluminum suspension axle, 6 mm skewer | |
| | Rims | Bontrager BCX Blue/Red or | Mavic 221 | |
| | Tires | Tioga Psycho-K/T | 26 x 1.95, Kevlar bead | 22 32 42 |
| | Tubes | Presta | Superlite | |
| | Spokes | DT or Union Stainless | Alloy nipples, 32 front and rear | 11 -- 76 100 |
| | | Front | 270 15ga. | 12 48 70 92 |
| | | Rear- D/ND | 268/269 15ga. | 14 41 60 79 |
| Weight | | 23.1 lbs. | 10.5 kg | 16 36 52 69 |
| Color | | Moss Green | | 18 32 47 61 |
| | | | | 21 27 40 52 |
| | | | | 24 24 35 46 |
| | | | | 28 21 30 -- |

Geometry and Fit

| Sizes | 13.5 | 14.75 | 16.25 | 17.75 | 19.25 |
|-----------------------|---------|-------|-------|-------|-------|
| Standover height | 720 | 735 | 741 | 764 | 799 |
| | 28.3 | 28.9 | 29.2 | 30.1 | 31.5 |
| Effective top tube | 554 | 565 | 590 | 595 | 600 |
| | 21.8 | 22.2 | 23.2 | 23.4 | 23.6 |
| Reach | 636 | 656 | 695 | 714 | 732 |
| | 25.0 | 25.8 | 27.4 | 28.1 | 28.8 |
| Head tube length | 110 | 110 | 110 | 123 | 159 |
| Handlebars | 25.4 mm | 560 | 560 | 560 | 560 |
| Stem, 41 mm clamp ht. | 90 | 105 | 120 | 135 | 150 |
| | | 5 | 10 | 10 | 10 |
| Seatpost | 27.2 mm | 300 | 300 | 350 | 350 |
| Cranks | | 170 | 172.5 | 175 | 177.5 |
| Fork | | 184 | 184 | 184 | 197 |
| | | 38 | 38 | 38 | 38 |
| Trail | | 79 | 79 | 77 | 77 |
| Head angle | | 70.5 | 70.5 | 71 | 71.5 |
| Seat angle | | 73 | 73 | 73 | 73 |
| Wheelbase | | 1029 | 1040 | 1060 | 1065 |
| | | 40.5 | 40.9 | 41.7 | 41.9 |
| Chainstay length | | 424 | 424 | 424 | 424 |
| | | 16.7 | 16.7 | 16.7 | 16.7 |
| Bottom bracket height | | 298 | 298 | 298 | 298 |
| | | 11.7 | 11.7 | 11.7 | 11.7 |

Procaliber Notes

The OCLV frame on the Procaliber is the lightest production mountain bike frame in the world at just 2.92 pounds. Even though its so light, its still plenty stiff to give great handling and excellent power transfer. Although our Supercaliber has some higher level parts on it, the Procaliber has the more high tech frame.

Upgrades from the Supercaliber

OCLV frame

Procaliber Ltd.

Our Price: \$ _____

General Specs

| | | | |
|------------|--------------|--|--|
| Frameset | Frame | OCV | Carbon composite |
| | Fork | Rock Shox Judy SL | MCU elastomer w/adjustable compression damping |
| | Headset | Tange Seiki/WTB | 25.4/34.0/30.0, 27.0 mm stack height |
| Controls | Handlebars | Bontrager Ti | Butted |
| | Bar ends | Bontrager Magnesium | |
| | Stem | Bontrager or Control Tech Aluminum Ahead | |
| | Shifters | GripShift SRT-900 ESP | |
| | Brake levers | Shimano XT | V Brakes |
| | Grips | Kraton | |
| Saddle | | Bontrager Ti | Leather cover |
| | Seatpost | Synchros Ti | |
| | Seat binder | Fisher OCLV | 35 mm clamp w/ integral bolt |
| Brakes | | Shimano XT V Brakes | |
| Drivetrain | Crankset | White Industries | SS3 chainrings, 58/94 mm bolt hole circle |
| | BB | White Industries Ti | 73/114 |
| | Pedals | Shimano M747 SPD | Clipless, w/float |
| | F.derailleur | Shimano XT | Top pull, 34.9 mm / 1 ^{3/8} " |
| | R.derailleur | GripShift ESP-900 | Long cage |
| | Cassette | Shimano XT | 8 speed |
| | Chain | Shimano IG90 | |
| Wheelset | Hub, rear | White Industries | Compact HyperGlide cassette, 135 mm O.L.D. |
| | front | White Industries Tracker | 17 mm aluminum suspension axle, 6 mm skewer |
| | Rims | Mavic 217 SUP | |
| | Tires | Tioga Psycho-LTD/T | 26 x 1.95, SLX casing, Kevlar bead |
| | Tubes | Presta | Superlite |
| | Spokes | Wheelsmith | Stainless, double butted, alloy nipples, 32 front and rear |
| | | Front | 263 15/16ga. |
| | | Rear- D/ND | 259/261 15/16ga. |
| Weight | | 21.9 lbs. | 9.9 kg |
| Color | | Matte Violet | |

Geometry and Fit

| | 13.5 | 14.75 | 16.25 | 17.75 | 19.25 | |
|-----------------------|------|-------|-------|-------|-------|--------------|
| Sizes | 720 | 735 | 741 | 764 | 799 | |
| Standover height | 28.3 | 28.9 | 29.2 | 30.1 | 31.5 | 20 32 44 |
| Effective top tube | 554 | 565 | 590 | 595 | 600 | 11 -- 76 105 |
| Reach | 21.8 | 22.2 | 23.2 | 23.4 | 23.6 | 12 44 70 96 |
| Head tube length | 636 | 656 | 695 | 714 | 732 | 14 37 60 82 |
| Handlebars 25.4mm | 25.0 | 25.8 | 27.4 | 28.1 | 28.8 | 16 33 52 72 |
| Stem, 41 mm clamp ht. | 110 | 110 | 110 | 123 | 159 | 18 29 47 64 |
| Width | 560 | 560 | 560 | 560 | 560 | 21 25 40 55 |
| Length | 90 | 105 | 120 | 135 | 150 | 24 22 35 48 |
| Degrees rise | 5 | 10 | 10 | 10 | 10 | 28 19 30 -- |
| Seatpost 27.2mm | 300 | 300 | 350 | 350 | 350 | |
| Cranks | 170 | 172.5 | 175 | 175 | 177.5 | |
| Fork | 184 | 184 | 184 | 197 | 233 | |
| Length | 38 | 38 | 38 | 38 | 38 | |
| Steerer length | 79 | 79 | 77 | 77 | 77 | |
| Offset | 70.5 | 70.5 | 71 | 71.5 | 71.5 | |
| Trail | 73 | 73 | 73 | 73 | 73 | |
| Head angle | 1029 | 1040 | 1060 | 1065 | 1070 | |
| Seat angle | 40.5 | 40.9 | 41.7 | 41.9 | 42.1 | |
| Wheelbase | 424 | 424 | 424 | 424 | 424 | |
| Chainstay length | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | |
| Bottom bracket height | 298 | 298 | 298 | 298 | 298 | |
| | 11.7 | 11.7 | 11.7 | 11.7 | 11.7 | |

Procaliber Ltd. Notes

This is Gary's ultimate ride. When cost is no obstacle, and only the best will do, get a Procaliber Ltd.

Upgrades from the Procaliber

| | |
|--|--|
| Judy SL suspension fork | Tange Seiki WTB Grease Guard Aheadset |
| White Industries cranks w/Ti bottom bracket | GripShift ESP 900 shifters and rear derailleur |
| Italian Bontrager Ti saddle | Shimano M747 SPD clipless pedals |
| White Industries hubs w/custom front hub and | Fisher 6 mm skewer Mavic 217 SUP rims |
| Psycho LTD tires | DT or Wheelsmith 15/16 stainless spokes |

Fisher Full Suspension

Why full suspension?

Gary has ridden full suspension for along time, first working with Mert Lawill on the Fisher RS1. Suspension adds comfort to cycling. And that comfort means you can go faster, farther, and on more difficult terrain.

Doesn't full suspension have a lot of problems?

Like everything in bike design, there is a trade-off for the advantages of suspension. Weight, complexity, maintenance, adjustment, and efficiency are all considerations. With a good design like the Joshua, the weight penalty of full suspension is small enough that a Joshua can be the full time bike for lots of different riders, from bike path cruisers to NORBA racers.

Although it took some sophisticated engineering work, the Joshua's Unified Rear Triangle is pretty simple in that there is only one pivot to maintain. To compliment Gary's suspension design, he has chosen several models of rear shocks that highlight different levels of full suspension performance- whether a rider's goal is comfort, efficiency, or speed. And although some folks might complain that an active suspension bike will bob if you pedal squares, the overall picture is that you gain efficiency.

So how much bobbing is there?

A really plush fully active bike like the Joshua will move if you bounce on it, both front and rear. You must bear in mind that if a bike is to react to a small force *under* the suspension, it will also react to a small force *over* the suspension. The flip side is that the bike reacts to every little bump, keeping the tires on the ground and giving you incredible traction. But correct adjustment of the suspension and good pedaling technique with a round stroke will go a long ways to minimize any negative effect from the suspension.

Another detail missed by some is that the rear suspension is affected by the front suspension. If the fork allows your body to move downwards, the accelerated mass of your body will create additional force, and an active rear suspension will react to this force. A plush fork can definitely make the bike move up and down more. So if you set the bike up carefully for a test ride, you won't get much bobbing. But we like ours set up pretty soft, in which case you can get a lot of bobbing if you are bouncing on the bike by throwing yourself at the pedals.

Are both climbing and stopping traction improved?

Yes. Since the Joshua's design allows the wheels to follow the terrain better, the tires always maintain better contact with the ground. So all traction is improved. Even cornering. Combine the added traction with the Joshua's lateral rigidity, and this bike corners like it's on rails.

You mentioned lateral rigidity. How stiff is it?

The new Joshua bikes are about 15% stiffer torsionally than a Procaliber, and about 8% laterally. **Wow. That's awesome, because the Procaliber plenty stiff for most folks. How about weight?**

Well, you still have a weight penalty, but its not too bad. The top of the line Joshua Z goes at about 25.5 pounds, compared to around 23 pounds for a Procaliber.

They aren't really all that expensive. What's the down side?

A plush, fully active suspension is just that. Plush and active. If a rider gets on expecting it to feel like a rigid bike, or even a suspended hardtail, they'll miss what this bike is all about. What we've found is that the more we ride suspension, the softer we seem to like it. Under normal pedaling there is not a lot of motion that you can feel. You can see the shocks moving, though. When you get out of the saddle and sprint, the bike can move up and down, especially if the fork is set-up really soft. Most of the movement is the fork, and for this reason you may want to send your demos out with the fork at full damping, and somewhat high spring preload. After the rider gets used to an active feel, they can soften it up.

Of course, with the new Stratos rear shock on the Joshua Z, you can have it both ways. Plush and active, or locked out and rigid for efficiency in hard sprints and smooth climbs.

So mostly its just adjustment. How much air in the rear shock?

With the Stratos, your body weight in PSI, plus about 50% is a good starting point. Later, most folks will ride it on the softer side. But the best rule of thumb for any rear shock on the Joshuas is to look for about 2-4 mm compression of the shock when you sit on the bike. This works for air/oil as well as coil/over shocks like the Rock Shox.

How much travel do you actually get?

4 inches in the back, and 3 in the front with the long travel Judys, or 2.35 inches with a Quadra 21R.

So how do you describe this design?

Its a "Unified Rear Triangle" because the rear dropouts, the bottom bracket, the seat and chainstays, and the "seat tube" are all joined in a triangle. With this design, the bottom bracket and rear wheel cannot move toward or apart from one another, so there is no chain or pedal feedback. Its what makes the action of the rear end so supple.

Some other Unified Rear Triangles have really different pivot locations. Why is that?

The pivot of the Joshuas was located to minimize torsional flex, and to keep the bottom bracket and seat at the same distance. Otherwise, hitting a bump will make your seat feel like its moving up and down, although actually its the bottom bracket which moves. But having the seat move up and down can make it

Our Price: \$ _____

General Specs

| | | | |
|------------|---------------|-----------------------|--|
| Frameset | Frame | 6061 T6 aluminum | Oval cross section, Side butted |
| | Rear shock | Rock Shox Deluxe | Coil/over |
| | Fork | Rock Shox Quadra 21R | Micro-cellular urethane elastomer suspension |
| | Headset | Dia-Compe ST-2 | 25.4/ 34.0/ 30.0, 33.4 mm stack height |
| Controls | Handlebars | Aluminum alloy | |
| | Bar ends | Fisher Fishsticks | |
| | Stem | Aluminum | Ahead |
| | Shifters | GripShift SRT-400 | |
| | Brake levers | Dia-Compe PC-7N | W/reach adjusters |
| | Grips | Kraton | |
| Saddle | Seatpost | Bontrager Plus 10 | Micro-adjust |
| | Seat binder | Fisher Aluminum | 34.9 mm clamp w/ integral bolt |
| Brakes | | Shimano Alivio | |
| Drivetrain | Crankset | Sugino Impel 300 | SS3 chainrings, 58/94 mm bolt hole circle |
| | BB | Shimano BB-LP26 | 73/113 |
| | Pedals | Resin | Steel cage, clips and straps |
| | F. derailleur | Shimano LX | Top pull, 34.9 mm / 1 ^{3/8} " |
| | R. derailleur | Shimano LX SGS | Long cage |
| | Cassette | Shimano STX | 7 speed |
| | Chain | Shimano IG31 | |
| Wheelset | Hub, rear | Shimano Alivio | Compact HyperGlide cassette, 135 mm O.L.D. |
| | Front | Fisher Ginzu Team | 12 mm Cro-Moly suspension axle, 6 mm skewer |
| | Rims | Matrix Lobo | |
| | Tires | Tioga Psycho KS/TS | 26 x 1.95 |
| | Tubes | Presta | |
| | Spokes | DT or Union Stainless | 32 front and rear |
| | | Front | 269 15ga. |
| | | Rear- D/ND | 267/268 15ga. |
| | | 26.5 lbs. | 12.0 kg |
| Weight | | Matte P.C. Green | |
| Color | | | |

| | | | |
|--|-----------|-----------|-----------|
| | 20 | 32 | 42 |
| | 11 | -- | 76 100 |
| | 13 | 40 | 65 85 |
| | 15 | 35 | 56 73 |
| | 18 | 29 | 47 61 |
| | 21 | 25 | 40 52 |
| | 24 | 22 | 35 46 |
| | 28 | 19 | 30 -- |

Geometry and Fit

| | S | M | L |
|-------------------------------------|---------|--------------|------|
| Sizes | 550 | 580 | 610 |
| Effective top tube | 21.7 | 22.8 | 24.0 |
| Standover height | 678 | 668 | 662 |
| | 26.7 | 26.3 | 26.1 |
| Reach | 632 | 697 | 740 |
| | 24.9 | 27.4 | 29.1 |
| Head tube length | 125 | 125 | 145 |
| Handlebar | 25.4 mm | Width | 560 |
| Stem, 41 mm clamp ht. | 90 | Length | 560 |
| | 90 | 135 | 150 |
| | 5 | Degrees rise | 5 |
| | 10 | 10 | 10 |
| Seatpost | 27.2 mm | Length | 300 |
| Cranks | 170 | 175 | 175 |
| | 170 | 175 | 175 |
| | M | L | L |
| Fork | 198 | 198 | 218 |
| | 42 | 42 | 42 |
| | 70 | 73 | 73 |
| Trail | 71 | 70.5 | 70.5 |
| Head angle | 74 | 73.5 | 73.5 |
| Seat angle | 1043 | 1074 | 1104 |
| Wheelbase | 41.1 | 42.3 | 43.5 |
| | 430 | 430 | 430 |
| Chainstay length | 16.9 | 16.9 | 16.9 |
| | 311 | 311 | 311 |
| Bottom bracket height - with no sag | 12.2 | 12.2 | 12.2 |

Joshua X Notes

Although this Joshua is pretty affordable as full suspension bikes go, we didn't cut corners in suspension performance to get here. The 'X' offers a full 4 inches of usable travel, durable and low maintenance pivot with lots of rigidity, and overall low weight. Sticking with our feelings about suspension performance, we even spec'd an expensive Fisher Ginzu Team front hub with 6 mm skewer on this bike to add steering control.

hard for you to pedal. This defeats the purpose of having an active suspension.

Also, some URT designs are meant to "lock out" when you stand, while our goal was to keep the suspension active all the time. With these other designs, in order for the rear wheel to get over a bump, it has to lift the bottom bracket the same amount as the distance change from saddle to bottom bracket we were just discussing around; 1.5 inches, depending on the design. Since our pivot is located almost directly above the bottom bracket, the rear wheel doesn't really have to lift you during its movement over a bump. With a Joshua, if the rear wheel moves up 4", the bottom bracket only has to lift 1/4". No lifting, no lockout.

How much does the Joshua bottom bracket move?

If you fully compress all four inches at the wheel, the bottom bracket will move up about 1/4 inch, and back only about 3/4 inch. Since it would be hard to stay seated and pedal through such a hard bump, you can't feel this small amount of motion. After all, your saddle would compress more than 1/4 inch if you stayed seated through 4" of suspension movement.

How does this pivot location minimize flex?

Think of it this way. The longer the wrench, the more you can twist a bolt or nut, right? Well, the further the pivot is away from a straight line between the bottom bracket and the head tube, the more torque you can apply to the pivot, causing more torsional flex. You want to prevent torsional flex so the wheels track true and the bike handles better.

In addition, the further forward on the bike you move the pivot, the greater the chances that a front wheel impact would activate the rear shock. We placed the Joshua bike pivot so that it has fully independent suspension.

What about the pivot, anyway?

Its an electroless Nickel plated aluminum axle riding on a Teflon impregnated composite bearing.

Sounds cool! What's special about it?

Its maintenance free. You don't even have to lube it. In fact, you shouldn't because some lubes may damage the Teflon lubrication in the bearing. Just wash the pivot area with a little soap and water.

Fitting the Joshua bikes

With the Joshua bike frame, its hard to even say it has a top tube, but we'll use the term for discussion's sake. With the dropped top tube design of the Joshua the correct frame size offers way more standover than usual for most mountain bikes.

Since there's less than one inch variance in the standover for all three frame sizes, most riders will find they can straddle all three sizes. Choose the bike with the rider's preference for reach and handlebar height, and make sure that the rider's seat post adjustment leaves at least one inch of clearance over the top of the shock. The seatpost can be raised to its normal full length, to the highest point where the Minimum Insertion mark is still in the frame.

Selling the Joshua Bikes

With any suspension bike it will help a great deal to set the bike up properly for a test ride. We recommend that you try the following 2 Step procedure for your own test ride, then follow it with your customers with your own modifications as desired.

For a first ride we recommend setting the bike up with no sag in the rear shock and set the fork up at its stiffest setting. This is a firm setting. As you set the bike up firm, explain to the customer that the bike can easily be set up softer as they get used to it, and that you will have them try that, too.

After this initial test ride soften the bike up so that there is 2-4 mm of sag measured at the rear shock with the rider in the saddle, and 5-10 mm in the fork. Then ride the bike again.

We find that some folks like the fork set at full soft. In any case, you won't want more than 2-4 mm of sag at the rear shock as this may cause the bottom bracket to be too low.

Here's how to show your customer the difference between our pivot location and that of other URT bikes:

Place the eraser end of a pencil on the counter to represent the pivot on the bike. We'll have the other end represent the rear wheel. Have your customer move this end of the pencil up and down to illustrate the wheel moving over a big bump.

With the Joshua pivot, the bottom bracket is roughly 1/80th of the way from the pivot to the rear axle. Place your finger about 1/4" from the eraser and push down on the pencil while the customer "moves the wheel over a bump". Point out that your finger pressure does little to resist the wheel movement, while it also does not move up and down much during wheel travel.

With other designs, the bottom bracket is located about 1/4 of the way from the pivot to the rear wheel. To demonstrate what this means, place your finger about 1 to 1.5 inches from the 'pivot' and have your customer 'move the wheel'. Your finger can now prevent the 'wheel' from moving, and when the wheel moves, your finger will be moving up and down considerably.

Joshua Y

Our Price: \$ _____

General Specs

| | | | |
|------------|---------------|-------------------------|--|
| Frameset | Frame | 6061 T6 aluminum | Oval cross section, Side butted |
| | Rear shock | Rock Shox Super Deluxe | Coil/over w/adjustable rebound damping |
| | Fork | Rock Shox Judy XC | MCU elastomer, adj. comp. damping, 75 mm travel |
| | Headset | Dia-Compe SA-2 | 25.4/ 34.0/ 30.0, 26.5 mm stack height |
| Controls | Handlebars | Bontrager Race | Aluminum alloy |
| | Bar ends | Fisher Fish Fins | Welded aluminum |
| | Stem | Aluminum | Ahead |
| | Shifters | GripShift SRT-800 X-Ray | |
| | Brake levers | Dia-Compe PC-7N | W/reach adjusters |
| | Grips | Kraton | |
| Saddle | | Bontrager Plus 10 | Hollow Cro-Moly rails, leather cover |
| | Seatpost | Bontrager Comp | Aluminum |
| | Seat binder | Fisher Aluminum | 34.9 mm clamp w/ integral bolt |
| Brakes | | Shimano LX | |
| Drivetrain | Crankset | Sugino Impel 700 | SS3 hard anodized rings, 58/94 mm bolt hole circle |
| | BB | Shimano BB-UN52 | 73/113 |
| | Pedals | Shimano M535 SPD | Clipless, w/float |
| | F. derailleur | Shimano LX | Top pull, 34.9 mm / 1 ^{3/8} " |
| | R. derailleur | Shimano XT SGS | Long cage |
| | Cassette | Shimano LX | 8 speed |
| | Chain | Shimano IG70 | |
| Wheelset | Hub, rear | Shimano LX | Compact HyperGlide cassette, 135 mm O.L.D. |
| | front | Fisher Ginzu Team | 12 mm Cro-Moly suspension axle, 6 mm skewer |
| | Rims | Bontrager BCX-1 | |
| | Tires | Tioga Psycho K/T | 26 x 1.95 |
| | Tubes | Presta | Superlite |
| | Spokes | DT or Union Stainless | 32 front and rear |
| | | Front | 270 15ga. |
| | | Rear- D/ND | 268/269 15ga. |
| Weight | | 26.0 lbs. | 11.8 kg |
| Color | | Matte Copper | |

Geometry and Fit

| Sizes | S | M | L | |
|-------------------------------------|------|------|------|---------------------|
| Effective top tube | 550 | 580 | 610 | |
| | 21.7 | 22.8 | 24.0 | 20 32 42 |
| Standover height | 678 | 668 | 662 | |
| | 26.7 | 26.3 | 26.1 | 11 -- 76 100 |
| Reach | 632 | 697 | 740 | |
| | 24.9 | 27.4 | 29.1 | 12 44 70 92 |
| Head tube length | 125 | 125 | 145 | |
| Handlebar 25.4 mm | 560 | 560 | 560 | 14 37 60 79 |
| Stem, 41 mm clamp ht. | 90 | 135 | 150 | 16 33 52 69 |
| | 5 | 10 | 10 | 18 29 47 61 |
| Seatpost 27.2 mm | 300 | 350 | 350 | 21 25 40 52 |
| Cranks | 170 | 175 | 175 | 24 22 35 46 |
| Fork | 198 | 198 | 218 | 28 19 30 -- |
| | 42 | 42 | 42 | |
| Trail | 70 | 73 | 73 | |
| Head angle | 71 | 70.5 | 70.5 | |
| Seat angle | 74 | 73.5 | 73.5 | |
| Wheelbase | 1043 | 1074 | 1104 | |
| | 41.1 | 42.3 | 43.5 | |
| Chainstay length | 430 | 430 | 430 | |
| | 16.9 | 16.9 | 16.9 | |
| Bottom bracket height - with no sag | 311 | 311 | 311 | |
| | 12.2 | 12.2 | 12.2 | |

Joshua Y Notes

The Joshua Y has the features required for hard core suspension riding; a 3" travel fork with adjustable damping, and 4" of rear wheel travel using a coil/over rear shock which also has adjustable damping. And since its a hard core's bike, we also made it an 8 speed rear end, used a lighter wheelset and added clipless pedals.

Upgrades from the Joshua X

| | |
|--|------------------------------------|
| Rock Shox Judy XC-Long travel suspension fork | Rock Shox Super Deluxe rear shock |
| Bontrager handlebars, seatpost, and BCX-1 rims | Hollow Cro-Moly saddle rails |
| GripShift SRT-800 shifters w/Shimano LX/XT derailleurs | Fisher FishFins bar ends |
| Sugino Impel 700 cranks | Psycho K/T tires with Kevlar beads |
| Shimano M535 SPD clipless pedals | |

Joshua Z

Our Price: \$ _____

General Specs

| | | | |
|------------|---------------|------------------------|---|
| Frameset | Frame | 6061 T6 aluminum | Oval cross section, Side butted |
| | Rear shock | Stratos | Air/oil w/adjustable damping, handlebar control |
| | Fork | Rock Shox Judy SL | MCU elastomer, adj. comp. damping, 75 mm travel |
| | Headset | Tange-Seiki DL-2 | 25.4/ 34.0/ 30.0, 25.8 mm stack height |
| Controls | Handlebars | Bontrager Ti | |
| | Bar ends | Fisher Fish Fins | |
| | Stem | Bontrager | Aluminum Ahead |
| | Shifters | Shimano XT | |
| | Brake levers | Shimano XT | |
| | Grips | Fisher Hex | High density foam |
| Saddle | | Bontrager Ti | Leather cover |
| | Seatpost | Bontrager Race Lite | Aluminum |
| | Seat binder | Fisher Aluminum | 34.9 mm clamp w/ integral bolt |
| Brakes | | Shimano XT V Brakes | |
| Drivetrain | Crankset | Shimano XT | 58/94 mm bolt hole circle |
| | BB | Shimano BB-UN72 | 73/113 |
| | Pedals | Shimano M535 SPD | Clipless, w/float |
| | F. derailleur | Shimano XT | Top pull, 34.9 mm / 1 ^{3/8} " |
| | R. derailleur | Shimano XT SGS | Long cage |
| | Cassette | Shimano XT | 8 speed |
| | Chain | Shimano IG70 | |
| Wheelset | Hub, rear | Shimano XT | Compact HyperGlide cassette, 135 mm O.L.D. |
| | front | Fisher Ginzu Pro | 17 mm aluminum suspension axle, 6 mm skewer |
| | Rims | Bontrager BCX Red/Blue | |
| | Tires | Tioga Psycho K/T | 26 x 1.95 |
| | Tubes | Presta | Superlite |
| | Spokes | WheelSmith Stainless | Double butted, alloy nipples, 32 front and rear |
| | | Front | 270 15/16ga. |
| | | Rear- D/ND | 268/269 15/16ga. |
| Weight | | 25.0 lbs. | 11.3 kg |
| Color | | Polished | |

Geometry and Fit

| Sizes | S | M | L | |
|-------------------------------------|------|------|------|---------------------|
| Effective top tube | 550 | 580 | 610 | |
| | 21.7 | 22.8 | 24.0 | 22 32 42 |
| Standover height | 678 | 668 | 662 | |
| | 26.7 | 26.3 | 26.1 | 11 -- 76 100 |
| Reach | 632 | 697 | 740 | |
| | 24.9 | 27.4 | 29.1 | 12 48 70 92 |
| Head tube length | 125 | 125 | 145 | |
| Handlebar 25.4 mm | 560 | 560 | 560 | 14 41 60 79 |
| Stem, 41 mm clamp ht. | 90 | 135 | 150 | 16 36 52 69 |
| | 5 | 10 | 10 | 18 32 47 61 |
| Seatpost 27.2 mm | 300 | 350 | 350 | 21 27 40 52 |
| Cranks | 170 | 175 | 175 | 24 24 35 46 |
| Fork | 200 | 200 | 220 | 28 21 30 -- |
| | 42 | 42 | 42 | |
| Trail | 70 | 73 | 73 | |
| Head angle | 71 | 70.5 | 70.5 | |
| Seat angle | 74 | 73.5 | 73.5 | |
| Wheelbase | 1043 | 1074 | 1104 | |
| | 41.1 | 42.3 | 43.5 | |
| Chainstay length | 430 | 430 | 430 | |
| | 16.9 | 16.9 | 16.9 | |
| Bottom bracket height - with no sag | 311 | 311 | 311 | |
| | 12.2 | 12.2 | 12.2 | |

Joshua Z Notes

Gary's new suspension bike cuts over 5 pounds from his first try!

Upgrades from the Joshua Y

| | |
|---|--|
| Rock Shox Judy SL long travel suspension fork | Stratos air/oil rear shock w/remote damping adjustment |
| Bontrager Ti handlebars | Carbon brake arch |
| Shimano XT shifters, front derailleur, rear hub | Shimano XT V Brakes |
| Fisher Ginzu Pro front suspension hub | Bontrager Red/Blue rims |
| WheelSmith 15/16 spokes with alloy nipples | |

Avant Garde

Our Price: \$ _____

General Specs

| | | | | | | | |
|------------|---------------|---------------------|--|--|--|--|--------------------|
| Frameset | Frame | Cro-Moly main tubes | HiTensile stays | | | | |
| | Fork | Cro-Moly | | | | | |
| | Headset | Steel | 22.2/30.0/27.0, 33.0 mm stack height | | | | |
| Controls | Handlebars | Steel | 30 mm rise | | | | |
| | Stem | Steel | | | | | |
| | Shifters | GripShift MRX-100 | | | | | |
| | Brake levers | Alloy | | | | | |
| | Grips | Kraton | | | | | |
| Saddle | | Fisher | Supersoft foam | | | | |
| | Seatpost | Aluminum alloy | Micro-adjust | | | | |
| | Seat binder | Kalloy | M6 x 55 quick release | | | | |
| Brakes | | Shimano Altus CT91 | | | | | |
| Drivetrain | Crankset | Shimano Altus CT91 | Riveted | | | | |
| | BB | Shimano BB-CT91 | 68/118 | | | | |
| | Pedals | ATB nylon | | | | | |
| | F. derailleur | Shimano Altus C91 | Down pull, 28.6 mm / 1 ^{1/8"} | | | | |
| | R. derailleur | Shimano Acera-X | | | | | |
| | Cassette | Shimano HG30 | 7 speed | | | | |
| | Chain | KMC UG50 | | | | | |
| Wheelset | Hubs | Alloy QR | Compact HyperGlide cassette, 135 mm O.L.D. | | | | |
| | Rims | Weinmann 519 | | | | | |
| | Tires | Skinwall | 700x35 | | | | 24 32 38 |
| | Tubes | Schraeder | | | | | 11 -- 79 94 |
| | Spokes | Chrome plated | 36 front and rear | | | | 13 50 67 80 |
| | | Front | 296 15ga. | | | | 15 44 58 69 |
| | | Rear- D/ND | 293/295 15ga. | | | | 18 36 48 58 |
| Weight | | 26.4 lbs. | 12.0 kg | | | | 18 36 48 58 |
| Color | | Silver | | | | | 21 31 42 49 |
| | | Matte Aqua | | | | | 24 27 36 43 |
| | | | | | | | 28 23 31 -- |

Geometry and Fit

| Sizes | 13 | 15 | 17 | 19 | 21 | 23 | 15.5W | 18.5W |
|-----------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Standover height | 702 | 727 | 750 | 781 | 825 | 874 | 681 | 679 |
| Effective top tube | 27.6 | 28.6 | 29.5 | 30.7 | 32.5 | 34.4 | 26.8 | 26.7 |
| | 545 | 550 | 560 | 570 | 580 | 590 | 550 | 560 |
| Reach | 21.5 | 21.7 | 22.0 | 22.4 | 22.8 | 23.2 | 21.7 | 22.0 |
| | 602 | 621 | 631 | 643 | 667 | 677 | 621 | 633 |
| Head tube length | 23.7 | 24.4 | 24.8 | 25.3 | 26.3 | 26.7 | 24.4 | 24.9 |
| Handlebars | 90 | 90 | 90 | 100 | 140 | 157 | 120 | 165 |
| Stem | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm |
| Seatpost | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm |
| Cranks | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Fork | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Trail | 300 | 300 | 300 | 300 | 300 | 300 | 250 | 300 |
| Head angle | 170 | 170 | 170 | 170 | 170 | 170 | 170 | 170 |
| Seat angle | 123 | 125 | 128 | 138 | 184 | 195 | 168 | 201 |
| Wheelbase | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 |
| Chainstay length | 73 | 70 | 70 | 63 | 63 | 64 | 70 | 70 |
| Bottom bracket height | 70 | 70.5 | 70.5 | 71.5 | 71.5 | 71 | 70.5 | 71.5 |
| | 74 | 74 | 73 | 73 | 73 | 72.5 | 74 | 73 |
| | 1037 | 1038 | 1039 | 1040 | 1051 | 1063 | 1038 | 1039 |
| | 40.8 | 40.9 | 40.9 | 40.9 | 41.4 | 41.9 | 40.9 | 40.9 |
| | 430 | 430 | 430 | 430 | 430 | 430 | 430 | 430 |
| | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 |
| | 281 | 281 | 281 | 281 | 281 | 281 | 281 | 281 |
| | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 |

Avant Garde Notes

The Avant Garde is a traditional hybrid, Gary Fisher style. Extra Fisher touches include 15 gauge spokes on Weinmann rims for a light and resilient wheelset and a Fisher Supersoft foam saddle for comfort and pedaling efficiency. Gary used Cro-Moly in the frame where the thinner tubing would yield the best ride characteristics, the main triangle and the fork.

Zebrano

Our Price: \$ _____

General Specs

| | | | | | | | |
|------------|---------------|----------------------|--|--|--|--|---------------------|
| Frameset | Frame | Cro-Moly | | | | | |
| | Fork | Cro-Moly | | | | | |
| | Headset | Steel | 22.2/30.0/27.0, 30.9 mm stack height | | | | |
| Controls | Handlebars | Steel | | | | | |
| | Stem | Girvin Flexstem | Steel suspension | | | | |
| | Shifters | GripShift SRT-400 | | | | | |
| | Brake levers | Alloy | | | | | |
| | Grips | Kraton | | | | | |
| Saddle | | Fisher | "Supersoft" foam | | | | |
| | Seatpost | Aluminum alloy | Micro-adjust | | | | |
| | Seat binder | Fisher Steel | Integral QR | | | | |
| Brakes | | Shimano Acera-X | | | | | |
| Drivetrain | Crankset | Shimano Alivio | 67 mm bolt hole circle | | | | |
| | BB | Shimano BB-LP26 | 68/113 | | | | |
| | Pedals | Resin | Clips and straps | | | | |
| | F. derailleur | Shimano Acera-X | Down pull, 28.6 mm / 1 ^{1/8"} | | | | |
| | R. derailleur | Shimano Alivio | | | | | |
| | Cassette | Shimano STX | 7 speed | | | | |
| | Chain | KMC IG31 | | | | | |
| Wheelset | Hub, rear | Shimano Acera-X | Compact HyperGlide cassette, 135 mm O.L.D. | | | | |
| | front | Alloy | | | | | |
| | Rims | Weinmann 519 | | | | | 22 32 42 |
| | Tires | Tioga City Slicker 2 | 700x35 | | | | 11 -- 79 104 |
| | Tubes | Presta | | | | | 13 46 67 88 |
| | Spokes | Stainless | 32 front and rear | | | | 15 40 58 76 |
| | | Front | 304 15ga. | | | | 18 33 48 64 |
| | | Rear- D/ND | 302/303 15ga. | | | | 18 33 48 64 |
| Weight | | 25.8 lbs. | 11.7 kg | | | | 21 29 42 54 |
| Color | | Red | | | | | 21 29 42 54 |
| | | Matte Steel Blue | | | | | 24 25 36 48 |
| | | | | | | | 28 21 31 -- |

Geometry and Fit

| Sizes | 13 | 15 | 17 | 19 | 21 | 15.5W | 18.5W |
|-----------------------|---------|---------|---------|---------|---------|---------|---------|
| Standover height | 702 | 727 | 750 | 781 | 825 | 681 | 679 |
| Effective top tube | 27.6 | 28.6 | 29.5 | 30.7 | 32.5 | 26.8 | 26.7 |
| | 545 | 550 | 560 | 570 | 580 | 550 | 560 |
| Reach | 21.5 | 21.7 | 22.0 | 22.4 | 22.8 | 21.7 | 22.0 |
| | 639 | 644 | 668 | 678 | 688 | 644 | 668 |
| Head tube length | 25.2 | 25.4 | 26.3 | 26.7 | 27.1 | 25.4 | 26.3 |
| Handlebars | 90 | 90 | 90 | 100 | 140 | 120 | 165 |
| Stem | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm | 25.4 mm |
| Seatpost | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm | 22.2 mm |
| Cranks | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Fork | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Trail | 300 | 300 | 350 | 350 | 350 | 300 | 350 |
| Head angle | 170 | 170 | 175 | 175 | 175 | 170 | 175 |
| Seat angle | M | M | M | L | L | M | M |
| Wheelbase | 123 | 123 | 123 | 133 | 173 | 153 | 198 |
| Chainstay length | 50 | 50 | 50 | 50 | 50 | 50 | 50 |
| Bottom bracket height | 73 | 70 | 70 | 63 | 63 | 70 | 70 |
| | 70 | 70.5 | 70.5 | 71.5 | 71.5 | 70.5 | 71.5 |
| | 74 | 74 | 73 | 73 | 73 | 74 | 73 |
| | 1037 | 1038 | 1039 | 1040 | 1051 | 1038 | 1039 |
| | 40.8 | 40.9 | 40.9 | 40.9 | 41.4 | 40.9 | 40.9 |
| | 430 | 430 | 430 | 430 | 430 | 430 | 430 |
| | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 |
| | 281 | 281 | 281 | 281 | 281 | 281 | 281 |
| | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 |

Zebrano Notes

The Zebrano has a unique feature, the Girvin Flexstem. Shock absorption at the handlebars makes this a traditional hybrid with extra comfort features. Along with this more performance ride you get other Fisher touches as well, most notably the Fisher Spoon quick release lever on the seatpost.

Upgrades from the Avant Garde

| | | |
|------------------------------------|------------------------|----------------------------------|
| Full Cro-Moly frame | Girvin Flexstem | GripShift SRT-400 shifters |
| Fisher Spoon seatpost QR | Shimano Acera-X brakes | Alivio cranks with wider gearing |
| Acera-X front derailleur | Alivio rear derailleur | Stainless spokes |
| Resin pedals with clips and straps | | |

Alfresco

Our Price: \$ _____

General Specs

| | | | | | | | |
|------------|---------------|----------------------|--|-----------|-----------|-----------|------------|
| Frameset | Frame | Cro-Moly | Double butted | | | | |
| | Fork | Cro-Moly | 22.2/30.2/26.4, 30.9 mm stack height | | | | |
| Controls | Headset | Alloy | | | | | |
| | Handlebars | Aluminum alloy | | | | | |
| | Bar ends | Fisher Fishsticks | | | | | |
| | Stem | Girvin FlexStem | Alloy suspension | | | | |
| | Shifters | GripShift SRT-400 | | | | | |
| | Brake levers | Alloy | | | | | |
| | Grips | Kraton | | | | | |
| Saddle | | Fisher | "Supersoft" foam | | | | |
| | Seatpost | Aluminum alloy | Micro-adjust | | | | |
| | Seat binder | Fisher Steel | Integral QR | | | | |
| Brakes | | Shimano Alivio | | | | | |
| Drivetrain | Crankset | Sugino Impel 300 | 58/94 mm bolt hole circle | | | | |
| | BB | Shimano BB-LP26 | 68/110 | | | | |
| | Pedals | Resin | Steel cage, clips and straps | | | | |
| | F. derailleur | Shimano STX | Top Swing, down pull, 28.6 mm / 1 1/8" | | | | |
| | R. derailleur | Shimano STX SGS | Long cage | | | | |
| | Cassette | Shimano STX | 7 speed | | | | |
| | Chain | Shimano IG31 | | | | | |
| Wheelset | Hub, rear | Shimano Alivio | Compact HyperGlide cassette, 135 mm O.L.D. | | | | |
| | front | Alloy | Oversize axle | 20 | 32 | 42 | |
| | Rims | Weinmann ZAC 19 | | 11 | -- | 79 | 104 |
| | Tires | Tioga City Slicker 2 | 700x35 | | | | |
| | Tubes | Presta | | 13 | 42 | 67 | 88 |
| | Spokes | Stainless | 32 front and rear | 15 | 36 | 58 | 76 |
| | | Front | 296 15ga. | 18 | 30 | 48 | 64 |
| Weight | | Rear- D/ND | 294/295 15ga. | 21 | 26 | 42 | 54 |
| Color | | 25.9 lbs. | 11.8 kg | 24 | 23 | 36 | 48 |
| | | Ballistic Blue | | 28 | 19 | 31 | -- |

Geometry and Fit

| Sizes | 13 | 15 | 17 | 19 | 21 | 15.5W | 18.5W |
|-----------------------|---------|----------------|------|------|------|-------|-------|
| Standover height | 702 | 727 | 750 | 781 | 825 | 681 | 679 |
| Effective top tube | 545 | 550 | 560 | 570 | 580 | 550 | 560 |
| Reach | 641 | 646 | 664 | 675 | 689 | 646 | 664 |
| Head tube length | 90 | 90 | 90 | 100 | 140 | 120 | 165 |
| Handlebars | 25.4 mm | Width | 560 | 560 | 560 | 560 | 560 |
| Stem | 22.2mm | Length | 110 | 110 | 120 | 135 | 110 |
| | | Degrees rise | 10 | 10 | 10 | 10 | 10 |
| Seatpost | 27.2mm | Length | 300 | 300 | 350 | 350 | 300 |
| Cranks | | Length | 170 | 170 | 175 | 175 | 170 |
| | | Toe clip size | M | M | L | L | M |
| Fork | | Steerer length | 123 | 123 | 123 | 133 | 173 |
| | | Offset | 50 | 50 | 50 | 50 | 50 |
| Trail | | | 73 | 70 | 70 | 63 | 70 |
| Head angle | | | 70 | 70.5 | 70.5 | 71.5 | 71.5 |
| Seat angle | | | 74 | 74 | 73 | 73 | 74 |
| Wheelbase | | | 1037 | 1038 | 1039 | 1040 | 1051 |
| Chainstay length | | | 40.8 | 40.9 | 40.9 | 40.9 | 40.9 |
| Bottom bracket height | | | 430 | 430 | 430 | 430 | 430 |
| | | | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 |
| | | | 281 | 281 | 281 | 281 | 281 |
| | | | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 |

Alfresco Notes

The Alfresco is the connoisseur's hybrid. A double butted Cro-Moly frame coupled with an aluminum Girvin Flexstem puts it in a class of its own. And although it may be a super deluxe city bike, its bar ends make the Alfresco ready for some longer miles, too.

Upgrades from the Zebrano

| | | |
|------------------------|-------------------------|--------------------------------------|
| Double butted Cro-Moly | Aluminum Flexstem | Fisher Fishsticks bar ends |
| Alivio brakes | Sugino Impel 300 cranks | STX derailleurs, cassette, and chain |
| Alivio rear hub | Weinmann ZAC 19 rims | |

Our Price: \$ _____

Klunker

General Specs

| | | | | | | | |
|------------|---------------|-----------------|--|-----------|-----------|-----------|------------|
| Frameset | Frame | Cro-Moly | | | | | |
| | Fork | Cro-Moly | 22.2/30.2/26.4, 30.0 mm stack height | | | | |
| Controls | Headset | Steel | Retro bend | | | | |
| | Handlebars | Aluminum alloy | Forged | | | | |
| | Stem | Alloy | | | | | |
| | Shifters | Shimano STX | | | | | |
| | Brake levers | Shimano STX | | | | | |
| | Grips | Fisher Hex | High density foam | | | | |
| Saddle | | Brooks B-17 | Leather w/springs | | | | |
| | Seatpost | Aluminum alloy | Microadjust w/clamp for double rail | | | | |
| | Seat binder | Kalloy | M6 x 55 QR | | | | |
| Brakes | | Shimano Acera-X | | | | | |
| Drivetrain | Crankset | Shimano STX | 58/94 mm bolt hole circle | | | | |
| | BB | Shimano BB-LP26 | 68x110 | | | | |
| | Pedals | Alloy | Cro-Moly axles | | | | |
| | F. derailleur | Shimano STX | Top Swing, down pull, 28.6 mm / 1 1/8" | | | | |
| | R. derailleur | Shimano STX SGS | Long cage | | | | |
| | Cassette | Shimano STX | 7 speed | | | | |
| | Chain | KMC IG31 | | | | | |
| Wheelset | Hub, rear | Shimano STX | Compact HyperGlide cassette, 135 mm O.L.D. | | | | |
| | front | Alloy | Oversize axle | 22 | 32 | 42 | |
| | Rims | Femco | | 11 | -- | 76 | 100 |
| | Tires | Duro Knobby | 26 x 2.1 | | | | |
| | Tubes | Schraeder | 36 front and rear | 13 | 44 | 65 | 85 |
| | Spokes | Stainless | 264 14ga. | 15 | 38 | 56 | 73 |
| | | Front | 262/263 14ga. | 18 | 32 | 47 | 61 |
| Weight | | Rear- D/ND | 30.8 lbs. | 21 | 27 | 40 | 52 |
| Color | | Nickel | 13.9 kg | 24 | 24 | 35 | 46 |
| | | | | 28 | 21 | 30 | -- |

Geometry and Fit

| | |
|-----------------------|----------------|
| Size | 16.5 |
| Standover height | 766 |
| Effective top tube | 30.2 |
| Reach | 597 |
| Head tube length | 23.5 |
| Handlebars | 663 |
| Stem | 26.1 |
| | 120 |
| Seatpost | 25.4 mm |
| Cranks | 22.2 mm |
| Fork | Width |
| | Length |
| | Degrees rise |
| | 40 |
| | Length |
| | 400 |
| | Length |
| | 175 |
| | Steerer length |
| | 162 |
| | Offset |
| | 64 |
| Trail | 66 |
| Head angle | 68 |
| Seat angle | 69 |
| Wheelbase | 1140 |
| Chainstay length | 44.9 |
| Bottom bracket height | 477 |
| | 18.8 |
| | 303 |
| | 11.9 |

Klunker Notes

This is a replica of Gary's original mountain bike, but updated with modern components. Between the lighter parts and the full Cro-Moly frame, this new Klunker is about 10 pound sligher than Gary's original.

By carefully combing a low standover height, a long seatpost, and the long, swept back bars on a conventional type stem, the Klunker is designed to be a one-size-fits-all bike. Try it for yourself, and see!

Although mountain bikes have changed a lot since 1974, in some ways they are very similar. And the Klunker is still a lot of fun to ride. Friends saw Gary riding his personal 1996 Gary Fisher Klunker at Fat Tire festivals on both coasts during the fall of '95, and he even entered a cross country race on it. He says he smoked everyone on the downhill!

Nirvana

General Specs

Our Price: \$ _____

| | | | | | |
|------------|---------------|-----------------------|--|-----------------|-----------|
| Frameset | Frame | 6061 T6 aluminum | | | |
| | Fork | Cro-Moly | | | |
| | Headset | Tange Seiki Passage | 25.4/34.0/30.0, 33.4 mm stack height | | |
| Controls | Handlebars | Aluminum | "Arc" | | |
| | Stem | Cro-Moly | Alloy wedge | | |
| | Shifters | GripShift SRT-400 | | | |
| | Brake levers | Dia-Compe PC-7N | w/reach adjusters | | |
| | Grips | Kraton | | | |
| Saddle | | Bontrager Plus 10 | | | |
| | Seatpost | Aluminum alloy | Micro-adjust | | |
| | Seat binder | Fisher Aluminum | Integral QR | | |
| Brakes | | Shimano Alivio | | | |
| Drivetrain | Crankset | Sugino Fuse Comp | 58/94 mm bolt hole circle | | |
| | BB | Shimano BB-LP26 | 73/113 | | |
| | Pedals | Resin | Steel cage, clips and straps | | |
| | F. derailleur | Shimano STX | Top pull, 34.9 mm / 1 ^{3/8} " | | |
| | R. derailleur | Shimano STX SGS | Long cage | | |
| | Cassette | Shimano STX | 7 speed | | |
| | Chain | Shimano IG31 | | | |
| Wheelset | Hub, rear | Shimano Alivio | Compact HyperGlide cassette, 135 mm O.L.D. | | |
| | front | Alloy | Oversize axle | 26 36 46 | |
| | Rims | Matrix Lobo | | 11 | -- 86 110 |
| | Tires | Tioga City Slicker 2 | 26 x 1.5 | 13 | 52 73 93 |
| | Tubes | Presta | | 15 | 45 63 80 |
| | Spokes | DT or Union Stainless | 32 front and rear | 18 | 38 52 67 |
| | | Front | 269 15ga. | 21 | 32 45 57 |
| | | Rear- D/ND | 267/268 15ga. | 24 | 28 39 50 |
| Weight | | 24.6 lbs. | 11.2 kg | 28 | 24 34 -- |
| Color | | Slate | | | |

Geometry and Fit

| Sizes | 14 | 16 | 17.5 | 19.5 |
|-----------------------|---------|----------------|------|------|
| Standover height | 703 | 739 | 767 | 800 |
| | 27.7 | 29.1 | 30.2 | 31.5 |
| Effective top tube | 548 | 564 | 579 | 591 |
| | 21.6 | 22.2 | 22.8 | 23.3 |
| Reach | 642 | 671 | 699 | 725 |
| | 25.3 | 26.4 | 27.5 | 28.5 |
| Head tube length | 90 | 105 | 125 | 145 |
| Handlebars | 25.4 mm | Width | 560 | 560 |
| Stem | 25.4 mm | Length | 105 | 120 |
| | | Degrees rise | 5 | 10 |
| | | Insertion | 130 | 130 |
| Seatpost | 27.2 mm | Length | 300 | 350 |
| Cranks | | Length | 170 | 175 |
| | | Toe clip size | M | M |
| Fork | | Steerer length | 128 | 143 |
| | | Offset | 45 | 45 |
| Trail | | | 55 | 53 |
| Head angle | | | 72.5 | 73 |
| Seat angle | | | 75 | 75 |
| Wheelbase | | | 1023 | 1036 |
| | | | 40.3 | 40.8 |
| Chainstay length | | | 420 | 420 |
| | | | 16.5 | 16.5 |
| Bottom bracket height | | | 279 | 284 |
| | | | 11.0 | 11.2 |

Nirvana Notes

Call it a hybrid with an attitude. Gary says he was building a shop mechanic's bike, but with all modern parts. However you refer to the Nirvana, you'll find it's a blast to scream around town on this bike. Quick handling, and with streetable 26" wheels. Gearing set up for road riding or traffic light sprints. And rugged for the kind of pavement found in the heart of the city.

Utopia

Our Price: \$ _____

General Specs

| | | | | | |
|------------|---------------|-------------------------------------|---|-----------------|-----------|
| Frameset | Frame | 6061 T6 aluminum | | | |
| | Fork | Cro-Moly | | | |
| | Headset | Tange Seiki Passage | 25.4/34.0/30.0, 33.4 mm stack height | | |
| Controls | Handlebars | Aluminum | "Arc" | | |
| | Stem | Cro-Moly | Alloy wedge | | |
| | Shifters | GripShift SRT-600 | | | |
| | Brake levers | Dia-Compe PC-7N | w/reach adjusters | | |
| | Grips | Kraton | | | |
| Saddle | | Bontrager Plus 10 | | | |
| | Seatpost | Aluminum alloy | Hollow Cro-Moly rails | | |
| | Seat binder | Fisher Aluminum | Micro-adjust | | |
| Brakes | | Shimano STX-RC | Integral quick release | | |
| Drivetrain | Crankset | Sugino Fuse Pro | 58/94 mm bolt hole circle | | |
| | BB | Shimano BB-LP26 | 73/113 | | |
| | Pedals | Alloy | Clips and straps | | |
| | F. derailleur | Shimano LX | Top pull, 34.9 mm / 1 ^{3/8} " | | |
| | R. derailleur | Shimano LX | | | |
| | Cassette | Shimano LX | 8 speed | | |
| | Chain | Shimano IG31 | | | |
| Wheelset | Hub, rear | Shimano LX | Compact HyperGlide cassette, 135 mm O.L.D. | | |
| | front | Fisher Ginzu Team | 12 mm Cro-Moly suspension axle, 6 mm skewer | | |
| | Rims | Bontrager BCX Red/Blue or Mavic 221 | | 26 36 46 | |
| | Tires | IRC Smoothie | 26x1.25 | 11 | -- 86 110 |
| | Tubes | Presta | | 12 | 57 79 101 |
| | Spokes | DT or WheelSmith Stainless | Double butted, 32 front and rear | 14 | 49 67 86 |
| | | Front | 269 15/16ga. | 16 | 43 59 75 |
| | | Rear- D/ND | 267/268 15/16ga. | 18 | 38 52 67 |
| Weight | | 23.9 lbs. | 10.9 kg | 21 | 32 45 57 |
| Color | | Moss Green | | 24 | 28 39 50 |
| | | | | 28 | 24 34 -- |

Geometry and Fit

| Sizes | 14 | 16 | 17.5 | 19.5 |
|-----------------------|---------|-----------------|------|------|
| Standover height | 703 | 739 | 767 | 800 |
| | 27.7 | 29.1 | 30.2 | 31.5 |
| Effective top tube | 548 | 564 | 579 | 591 |
| | 21.6 | 22.2 | 22.8 | 23.3 |
| Reach | 642 | 671 | 699 | 725 |
| | 25.3 | 26.4 | 27.5 | 28.5 |
| Head tube length | 90 | 105 | 125 | 145 |
| Handlebars | 25.4 mm | Width | 560 | 560 |
| Stem | 25.4 mm | Length | 105 | 120 |
| | | Degrees rise | 5 | 10 |
| | | Insertion | 130 | 130 |
| Seatpost | 27.2 mm | Length | 300 | 350 |
| Cranks | | Length | 170 | 175 |
| | | Toe clip length | M | M |
| Fork | | Steerer length | 128 | 143 |
| | | Offset | 45 | 45 |
| Trail | | | 55 | 53 |
| Head angle | | | 72.5 | 73 |
| Seat angle | | | 75 | 75 |
| Wheelbase | | | 1023 | 1036 |
| | | | 40.3 | 40.8 |
| Chainstay length | | | 420 | 420 |
| | | | 16.5 | 16.5 |
| Bottom bracket height | | | 279 | 284 |
| | | | 11.0 | 11.2 |

Utopia Notes

The logical step up from the Nirvana, with 8 speeds and a non-Compact crankset. Really light wheels. Even details like hollow Cro-Moly saddle rails. Wanna go for pink slips?

Upgrades from Nirvana

| | | |
|--|------------------------------|-------------------------|
| GripShift SRT-600 shifters | Hollow Cro-Moly saddle rails | Shimano STX-RC brakes |
| Shimano LX derailleurs, cassette, and rear hub | Alloy pedals | Bontrager Red/Blue rims |
| WheelSmith 15/16 ga. stainless spokes | IRC Smoothie tires | Sugino Fuse Pro cranks |