


Seatposts



SEATPOSTS TECHNICAL SPECIFICATIONS:

Material:	Pillar:	Ti:	3Al2.5V Titanium alloy, heat-treated, natural finish
		Al 7075:	7075T78 - cold drawn seamless, hard anodized, black
		Al 6061:	6061T6 Al seamless, clear anodized
	Bolts:		M5 x .8, BT16 Titanium, heat-treated, cold-rolled thread
	Saddle:		Cold forged 7075 T76 aluminum
	Cap:		Custom extruded 6061 T6 aluminum
	Cradle:		Custom extruded 7075 T6 aluminum
	Rotary Nuts:		Brass 360
	Conical Washer:		Brass 360
Weight:	Ti:		195g - 27.0 Ø x 330mm
	Al 7075:		220g - 27.0 Ø x 330mm
	Al 6061:		285g - 27.0 Ø x 330mm

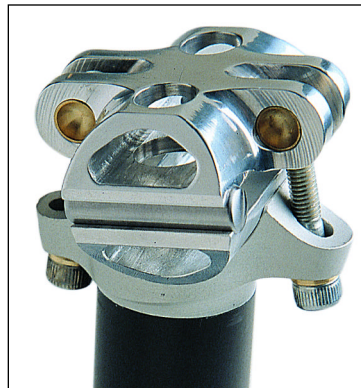

SEATPOSTS		26.0	26.2	26.4	26.6	26.8	27.0	27.2	27.4	28.0	28.2	28.4	28.6	29.0	29.2	29.4	29.6	29.8	30.0	30.2	30.4	30.6	30.8	30.9	31.0	31.2	31.4	31.6	31.8
Diameter (mm)																													
Titanium - 225mm						•	•	•	•																				
Titanium - 330mm						•	•	•	•																				
Aluminum 7075 - 225mm		•	•			•	•	•	•																				
Aluminum 7075 - 330mm		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Aluminum 7075 - 425mm		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Aluminum 6061 - 330mm						•	•	•																					

SYNCROS®

Syncros Applied Technology

2001 East Dyer Road, Santa Ana, CA 92705-5709, USA
 Telephone: (714) 481-2497 • Facsimile: (714) 481-2426 • www.syncros.com